


# F-1600 CB 動作特性曲線

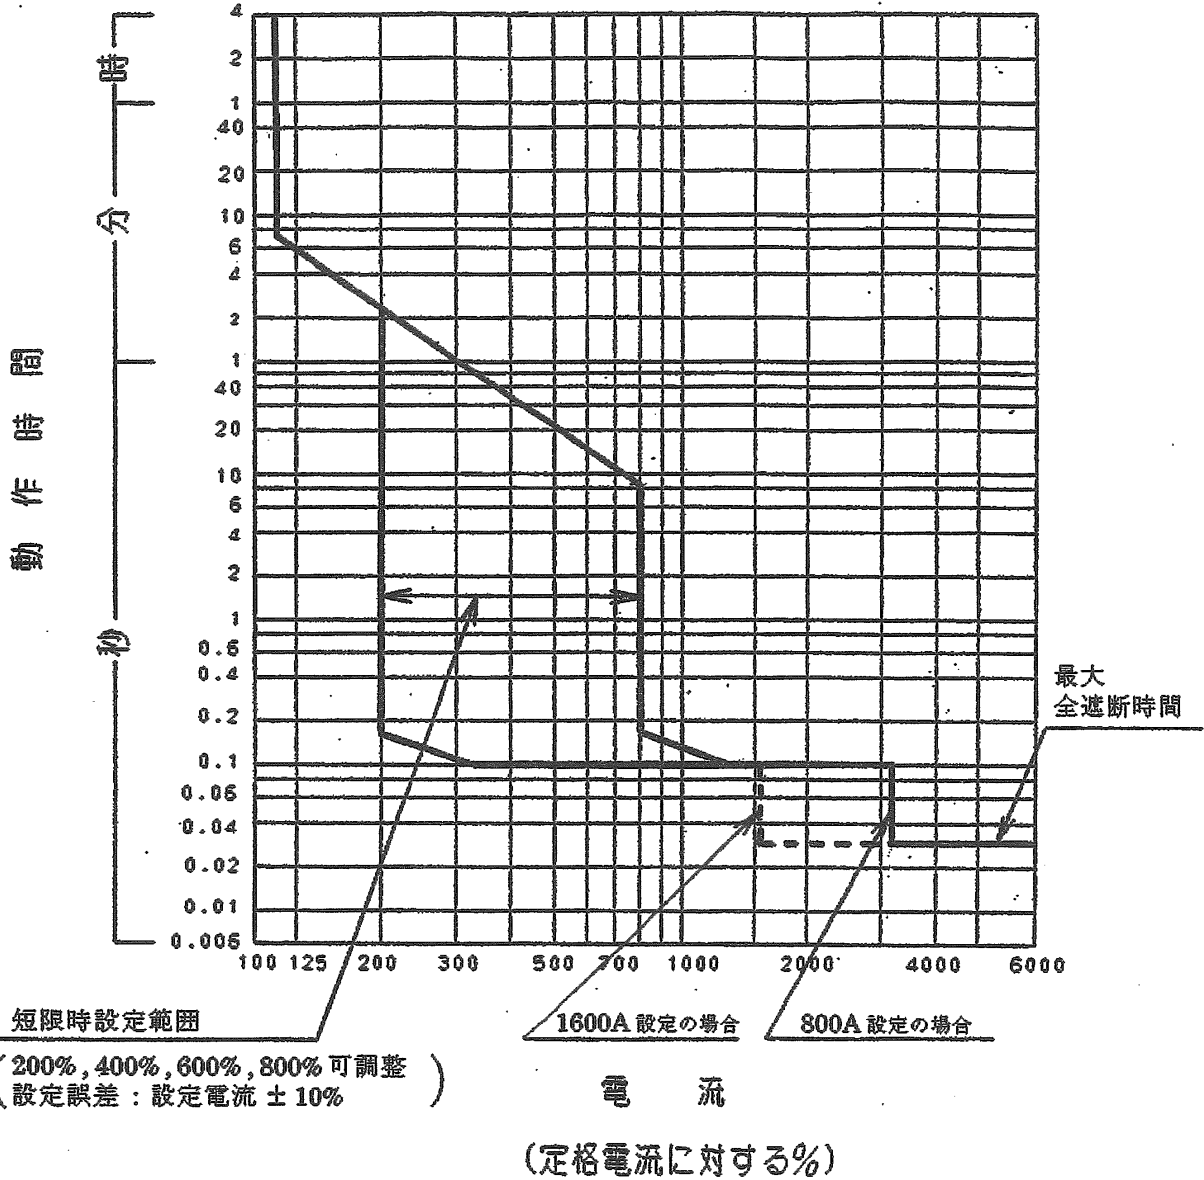

- 備考 1) 定格設定電流値 ; 800A, 900A, 1000A, 1200A, 1400A, 1600A 可調整  
 2) 瞬時設定電流値 ; 25 kA ± 4 kA 固定

CUSTOMER		DWN.	佐藤	1993-10-12		REV. NO.	
		CHKD.	佐藤	1993-10-12		動作特性曲線 01	01
QUANTITY	ORDER NO.	WORK NO.	APPD.	嶋野			
Hitachi Industrial Equipment Systems Co., Ltd.			NAKAJO WORKS DWG. NO.		SH.		
2002-04-01 嶋野、藤原、加藤			325 43046112		1/1		