
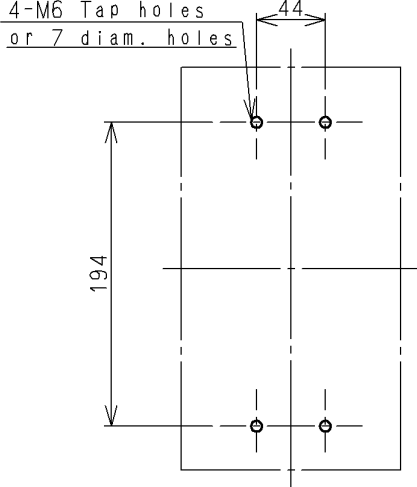


F-400GB FUSE FREE BREAKER

Type	Pole	Weight (kg)	Rated Voltage (V)	Rated Current (A)		Base Amb. Temp.
F-400GB	2	5.3	690	250	300	40℃
	3	6.1		350	400	

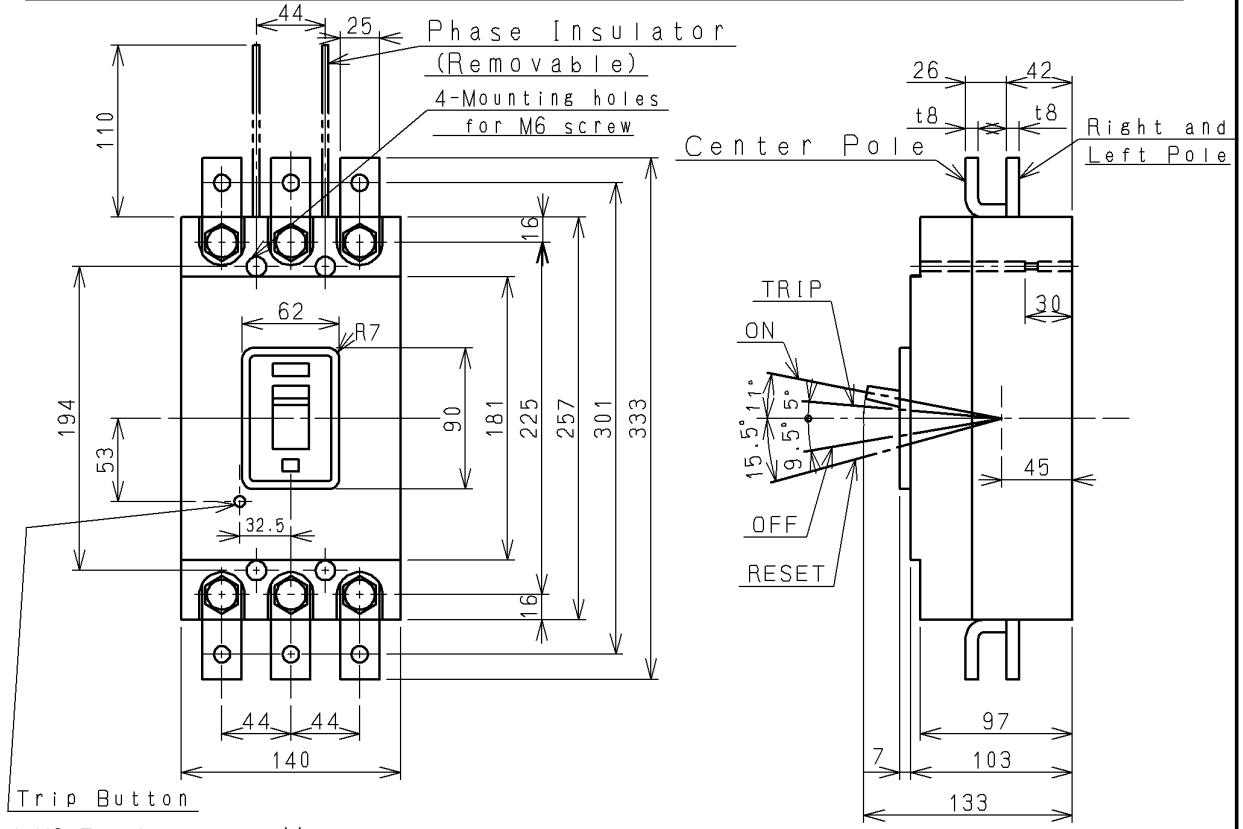

Drilling Plan

Interior Accessories	
Alarm Switch	C
Auxiliary Switch	C
Shunt Trip	V
Undervoltage Trip (with TB)	V

Remarks; 2 pole is Supplied in 3 pole unit.

CUSTOMER			DWN.	Y. Shimizu	09-Oct-2012		TITLE	Dimensions	REV.	00
			CHKD.	S. Sugai	09-Oct-2012					
QUANTITY	ORDER NO.	WORK NO.	APPD.	H. Aikawa	09-Oct-2012		NAKAJO WORKS DWG. NO. 325 43069131		SH.	1 1
Hitachi Industrial Equipment Systems Co., Ltd.										