
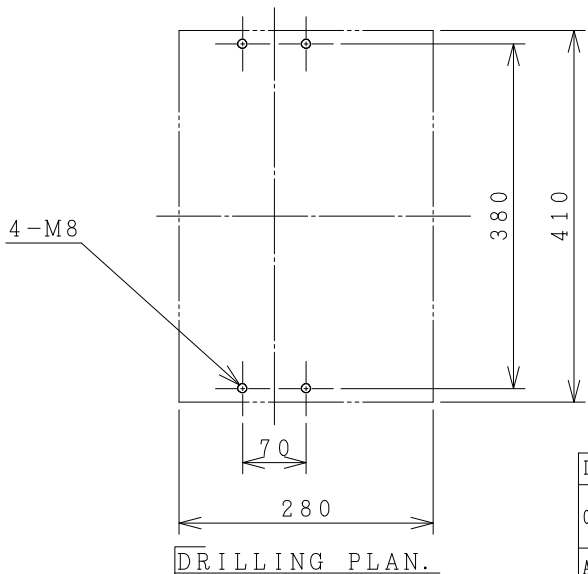


# HITACHI MOLDED CASE CIRCUIT BREAKER

Type	Poles	Rated Insulation Voltage (Ui)	IEC 60947-2 Icu/Ics [kA]		Rated Current	Base Ambient Temperature	Weight
			230V	400V			
F-1000K	4	690 V	125/32	85/22	1000 A	40 °C	33 kg

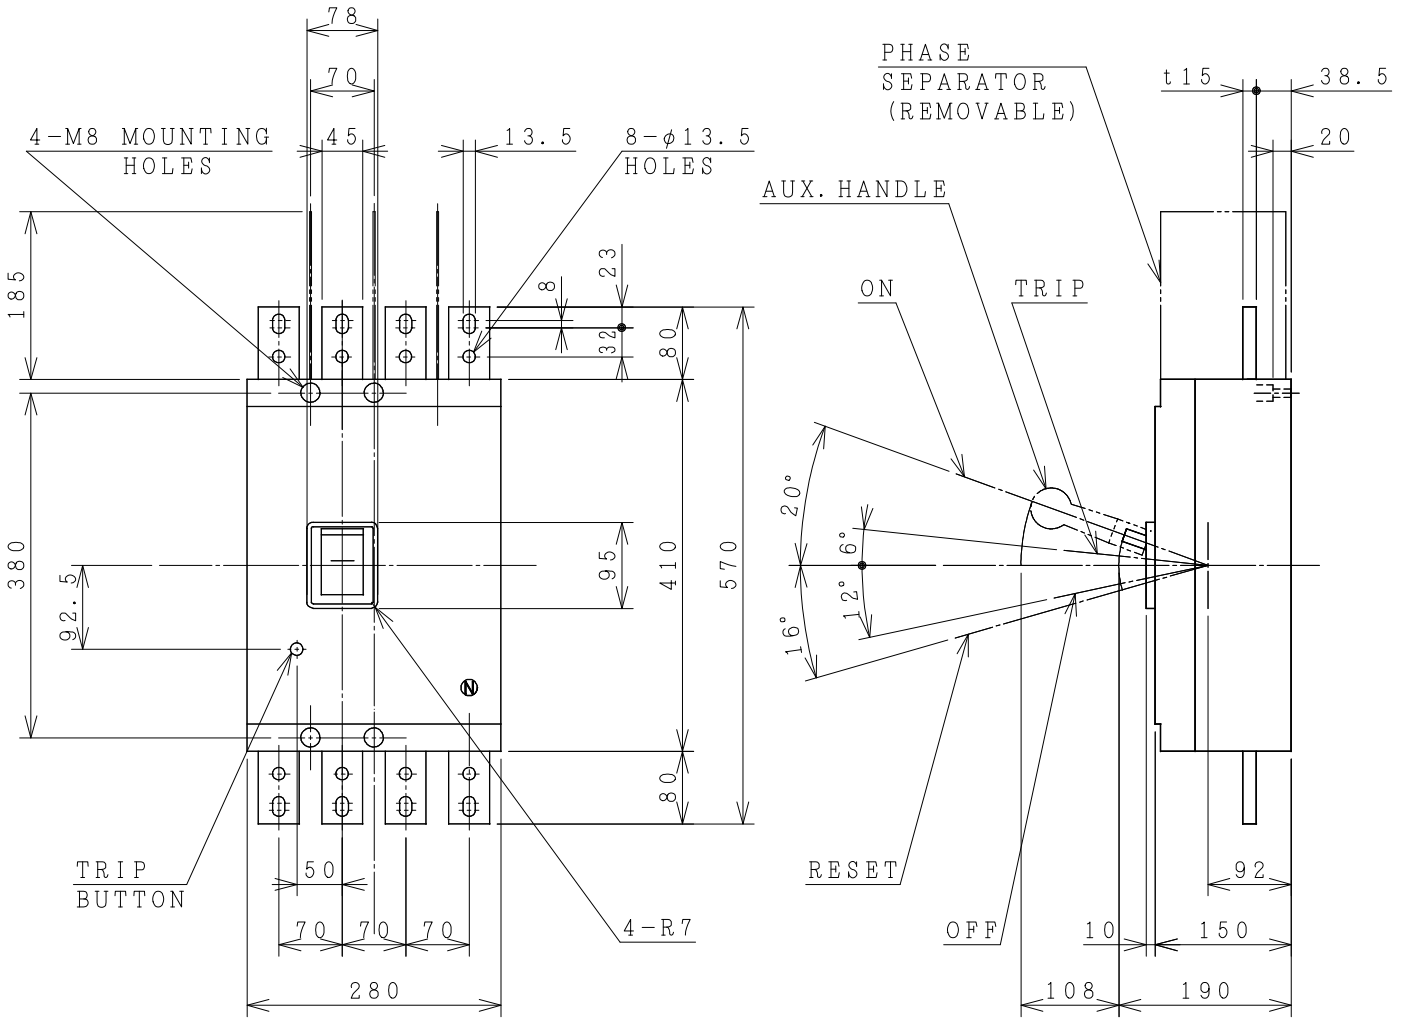

ACCESSORIES		
Part	Size	Q'ty
Phase separator	-	3
Terminal screw/bolt	M12x50	16
Mounting screw	M8x40	4
Assistant handle	-	1
Interior accessories		AL, AUX, SHT, UVT

DWN. S. CHAIAMPOL	06/03/17	PROJECTION	TITLE
CHKD. J. Jantee		SCALE	DIMENSION OF F-1000K
APPD. T. Kiatthasak		NTS.	
HITACHI Hitachi Industrial Technology (Thailand), Ltd.			HITT WORKS DWG. No. 4HTN000969
			REV. 00 SH. 01 01

(Reference 33020273R03).  
 ※REMARK  
 -DIMENSION UNIT = Millimeter (mm).