


HITACHI MOLDED CASE CIRCUIT BREAKER

Type	Poles	Rated Insulation Voltage (Ui)	IEC 60947-2 Icu/Ics [kA]		Rated Current	Base Ambient Temperature	Weight
			230V	400V			
S-30E	2	500 V	5/2	1.5/1	3 5 10	40 °C	0.25 kg
	3				15 20 30 A		0.37 kg

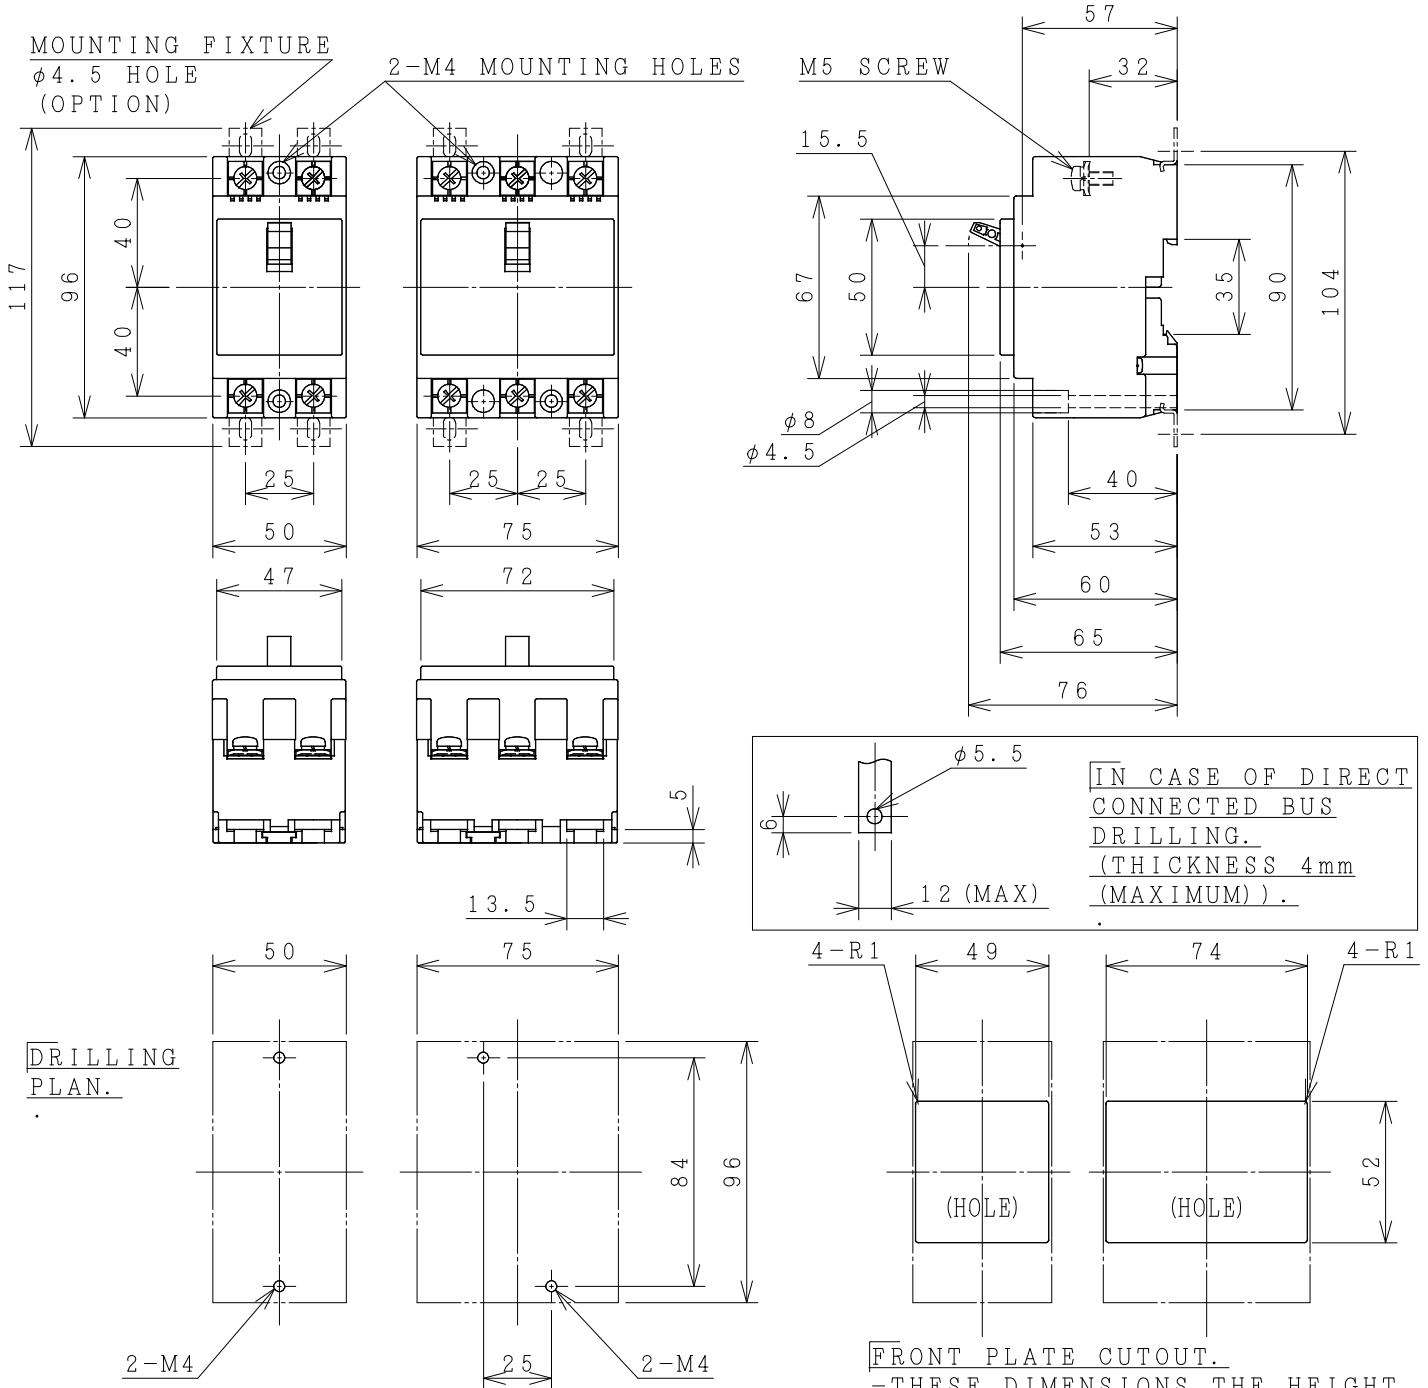

ACCESSORIES			
Part	Size	Qty	
		2P	3P
Phase separator	-	-	-
Terminal screw/bolt	M5	4	6
Mounting screw	-	-	-
Assistant handle	-	-	-
Interior accessories	AL, AUX, SHT		

(Reference 43057022R02).
 *REMARK
 -DIMENSION UNIT = Millimeter (mm).

DWN. S. CHAIAMPOL	06/03/17	PROJECTION	TITLE
CHKD. J. Jiradee	S	SCALE NTS.	DIMENSION OF S-30E
C. Krathrak			
APPD. T. Sotiguch	HITT WORKS DWG. No.		REV.
HITACHI Hitachi Industrial Technology (Thailand), Ltd.			00
			SH.
			01
			01

4HTN000978