


HITACHI MOLDED CASE CIRCUIT BREAKER

Type	Poles	Rated Insulation Voltage (Ui)	IEC 60947-2 Icu/Ics [kA]		Rated Current	Base Ambient Temperature	Weight
			230V	400V			
S-50EB	2	500 V	5/2	1.5/1	5 10 15 20 30 40 50 A	40 °C	0.25 kg
	3						0.37 kg

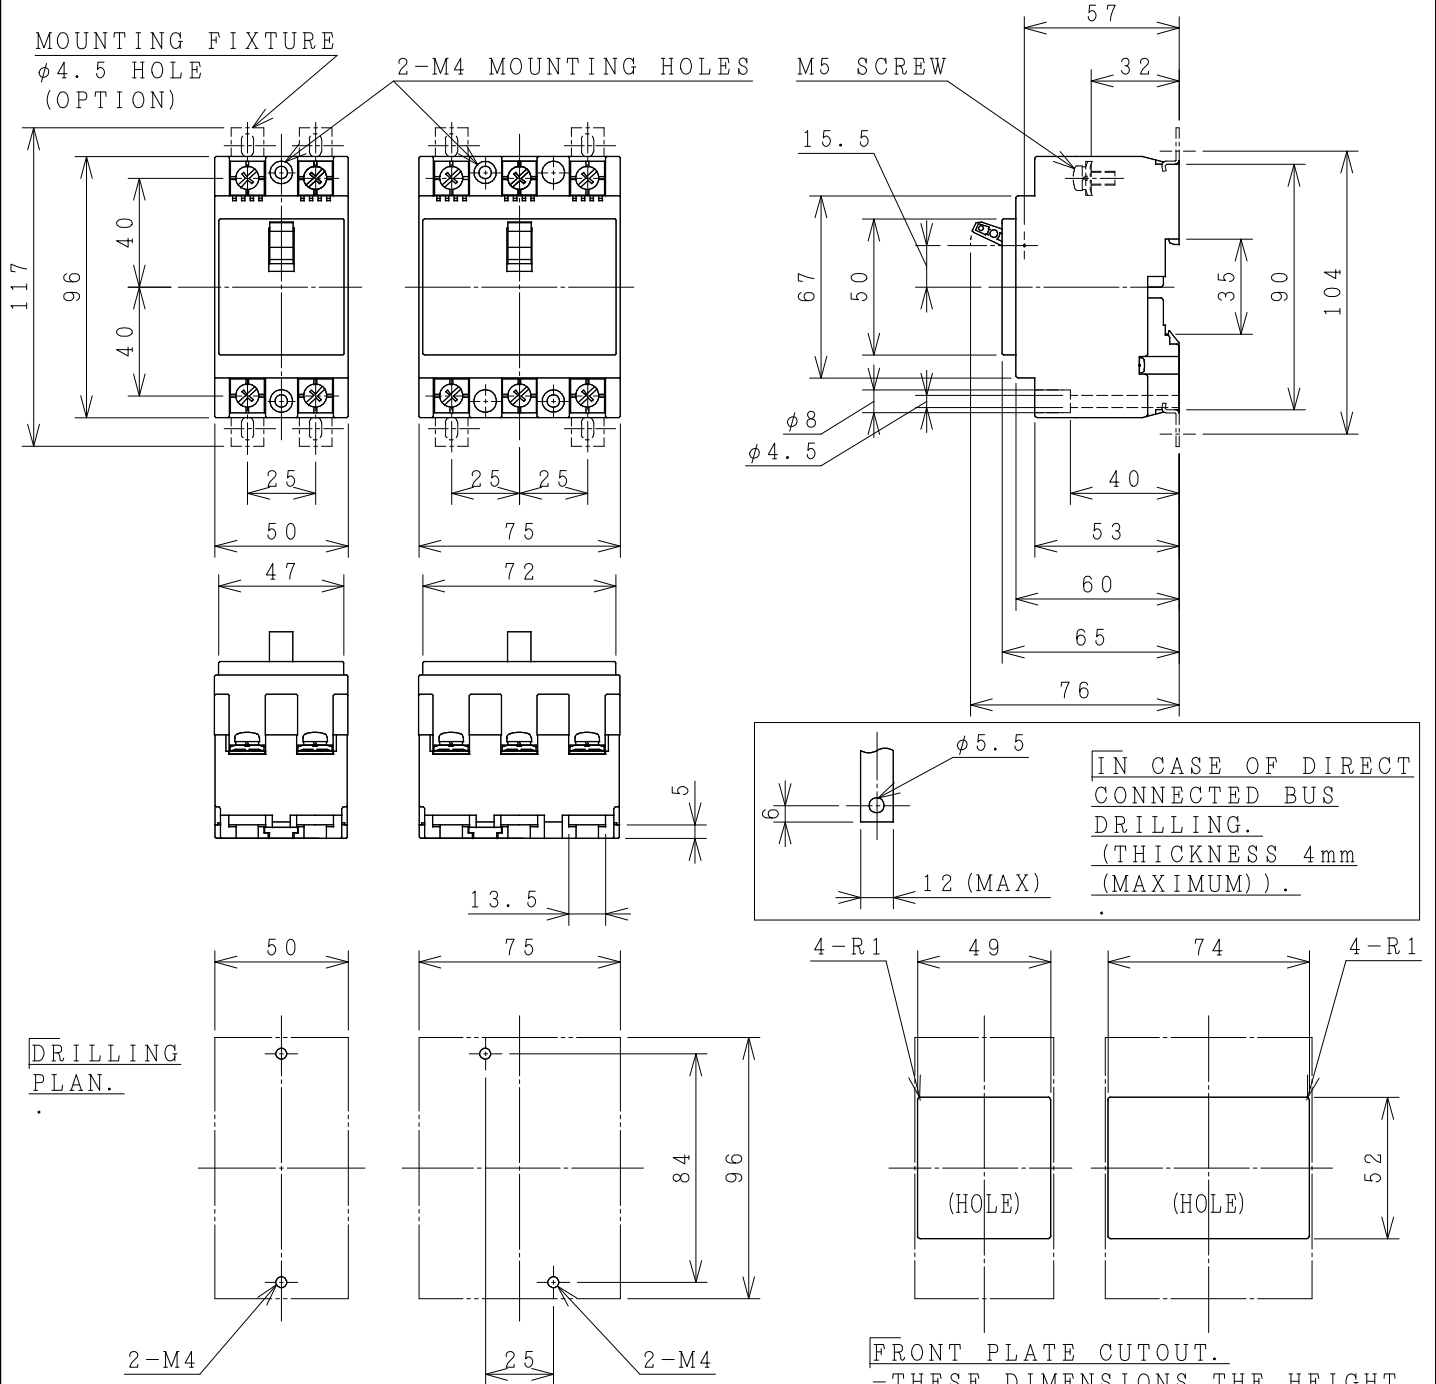

FRONT PLATE CUTOUT.

-THESE DIMENSIONS THE HEIGHT
OF FRONT PLATE FROM BASE
OF CASE TO COVER IS 60mm.
-CLEARANCE 1mm ON EACH SIDE
OF HANDLE.

ACCESSORIES			
Part	Size	Qty	
Phase separator	-	2P	3P
Terminal screw/bolt	M5	4	6
Mounting screw	-	-	-
Assistant handle	-	-	-
Interior accessories	AL, AUX, SHT		

DWN.	S. CHAIAMPOL	06/03/17	PROJECTION	TITLE	DIMENSION OF S-50EB	REV.
CHKD.	J. Jantee		SCALE			00
	C. Kiatthasak		NTS.			SH.
APPD.	J. Sakiguchi					01
HITACHI Hitachi Industrial Technology (Thailand), Ltd.					HITT WORKS DWG. No.	01
					4HTN000979	

(Reference 43057023R02).

*REMARK

-DIMENSION UNIT = Millimeter (mm).