


HITACHI MOLDED CASE CIRCUIT BREAKER

Type	Poles	Rated Insulation Voltage (Ui)	IEC 60947-2		Rated Current	Base Ambient Temperature	Weight
			Icu/Ics [kA]	230V			
SX600	3	690	50/25	36/18	300/350/400/ 500/600 Adjustable A	40 °C	Δ 9 kg
FX600			100/100	50/50			

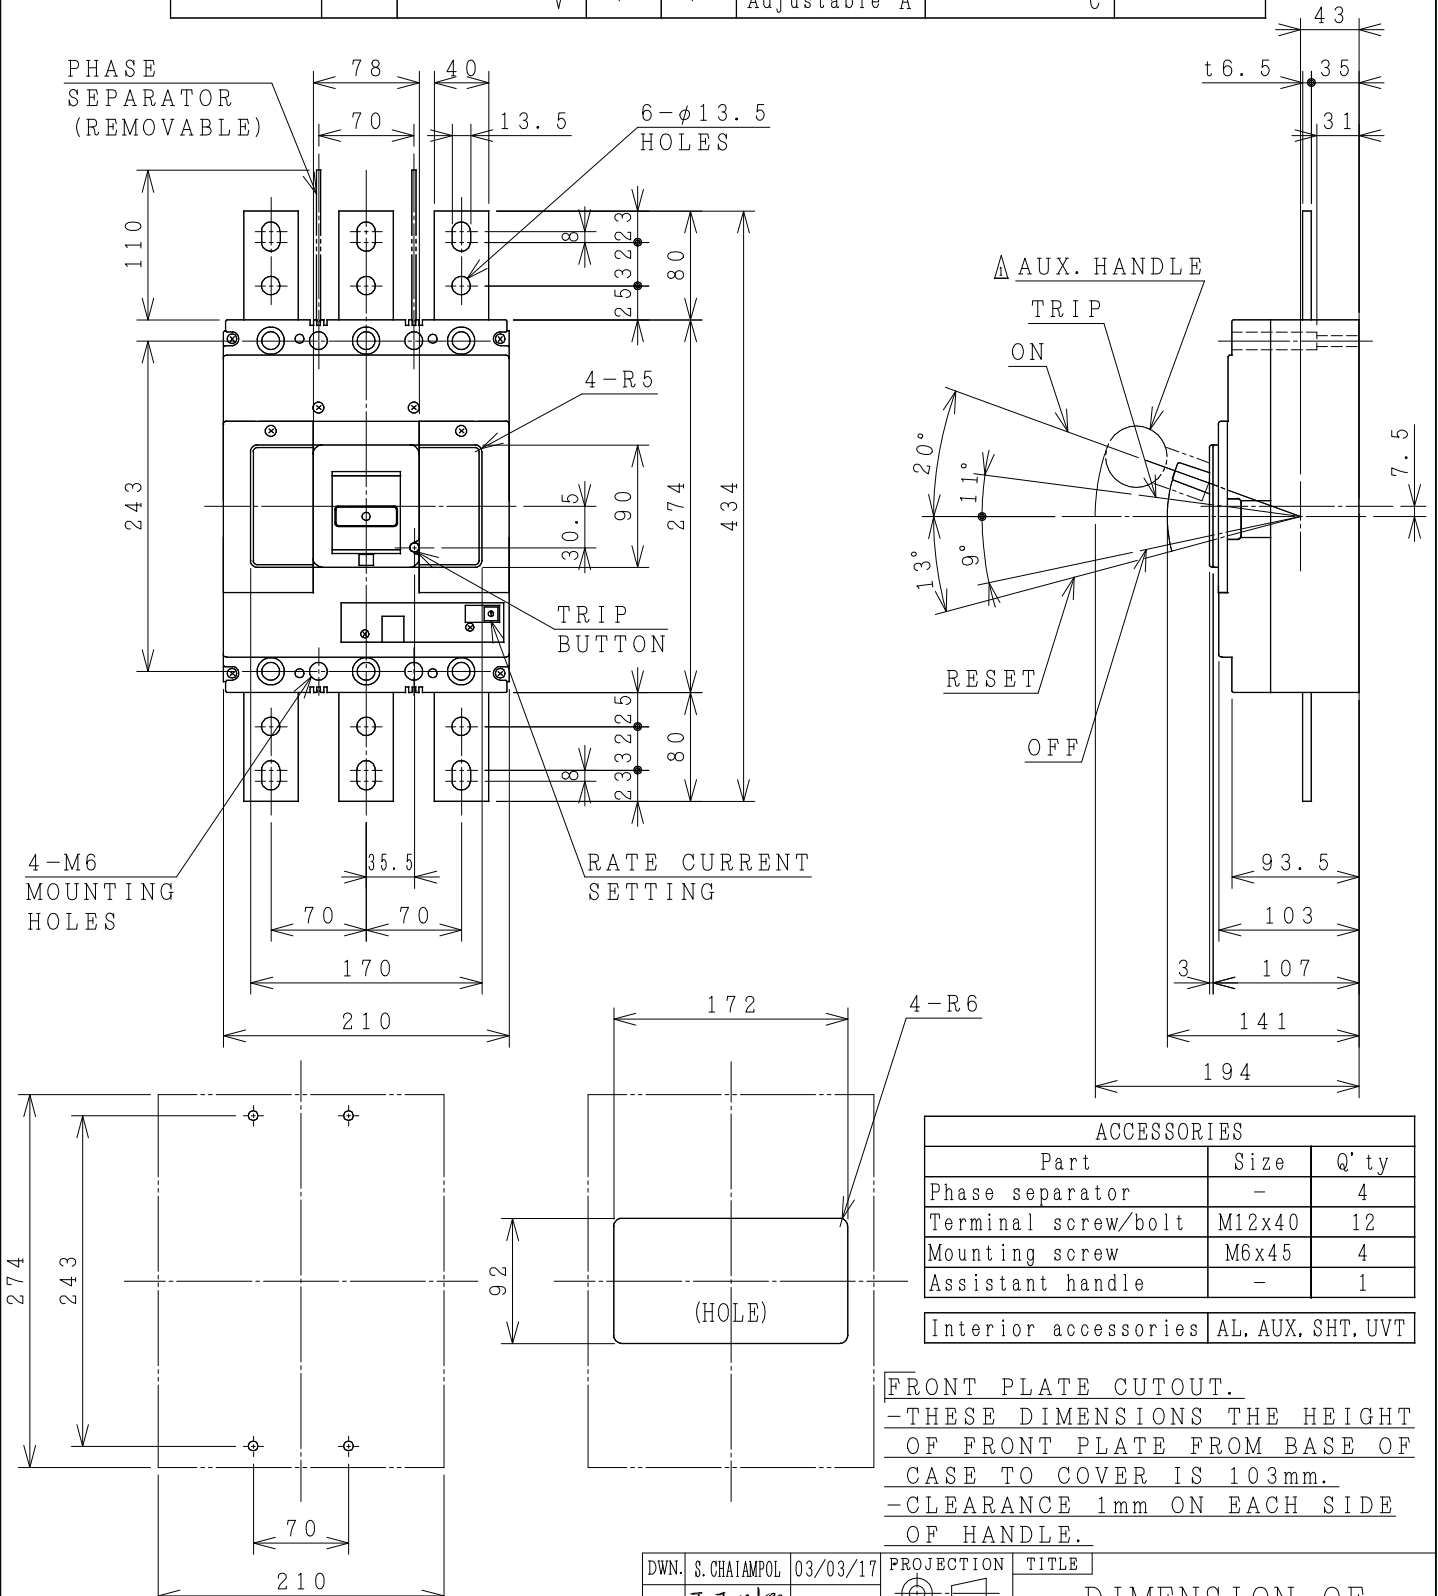

ACCESSORIES		
Part	Size	Q'ty
Phase separator	-	4
Terminal screw/bolt	M12x40	12
Mounting screw	M6x45	4
Assistant handle	-	1

Interior accessories | AL, AUX, SHT, UVT

FRONT PLATE CUTOUT.
 -THESE DIMENSIONS THE HEIGHT OF FRONT PLATE FROM BASE OF CASE TO COVER IS 103mm.
 -CLEARANCE 1mm ON EACH SIDE OF HANDLE.

DRILLING PLAN.
 (Reference 43052048R04).

REMARK
 -DIMENSION UNIT = Millimeter (mm).

07/07/20 O. SITTICHAJ / Ch. Chantorn / M. Somkiet / S. Sugai

DWN. S. CHAIAMPOL	03/03/17	PROJECTION	TITLE
CHKD. J. Jiradee		SCALE	DIMENSION OF SX600, FX600
APPD. C. Krathisak		NTS.	
HITACHI Hitachi Industrial Technology (Thailand), Ltd.			HITT WORKS DWG. No. 4HTN000984
			REV. 01 SH. 01 01