


HITACHI MOLDED CASE CIRCUIT BREAKER

Type	Poles	Rated Insulation Voltage (Ui)	IEC 60947-2 Icu/Ics [kA]		Rated Current	Base Ambient Temperature	Weight
			230V	400V			
SX800	3	690	85/43	36/18	400/450/500/ 600/700/800 Adjustable A	40	△10
FX800			100/100	50/50			

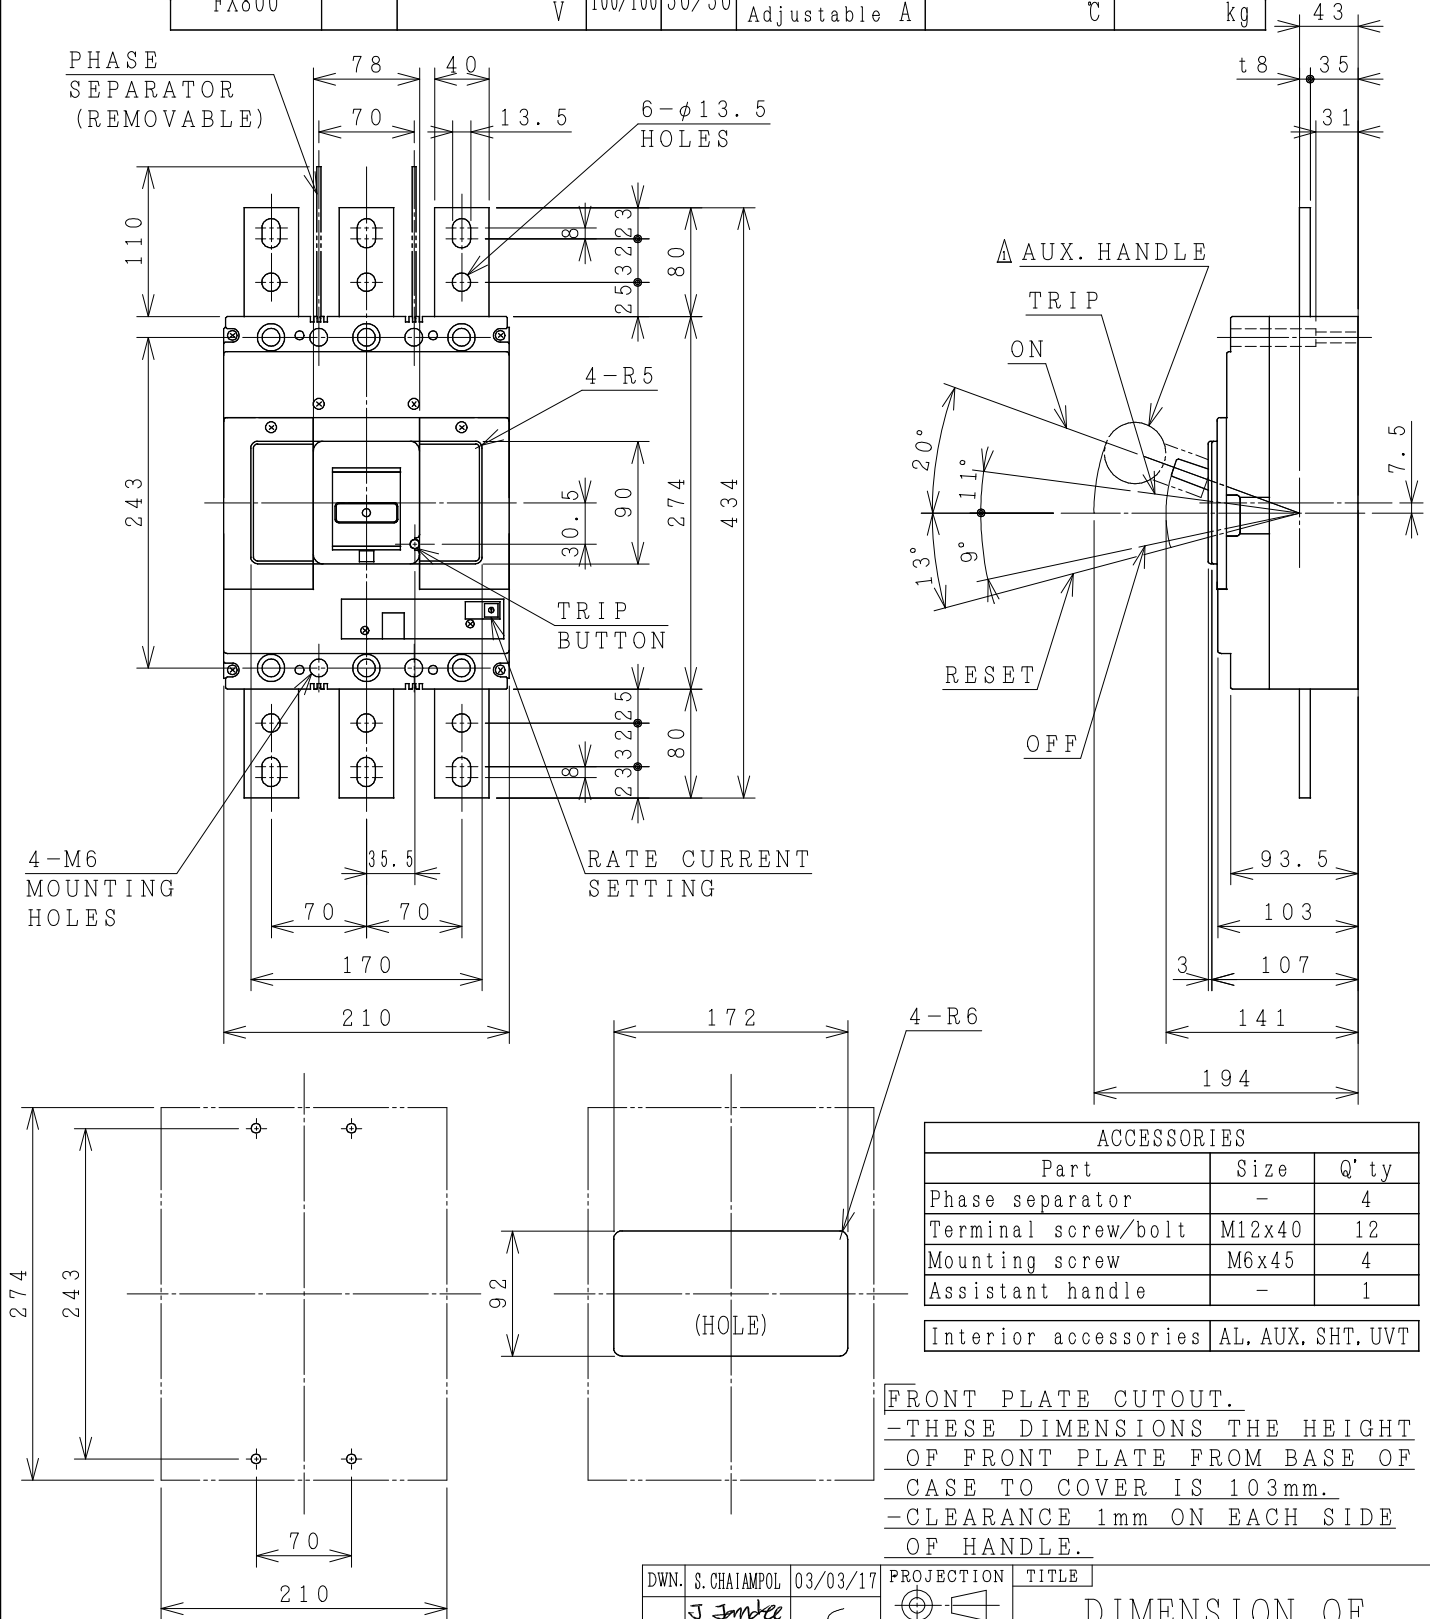

ACCESSORIES		
Part	Size	Q'ty
Phase separator	-	4
Terminal screw/bolt	M12x40	12
Mounting screw	M6x45	4
Assistant handle	-	1

Interior accessories AL, AUX, SHT, UVT

DRILLING PLAN.
(Reference 43052053R04).

REMARK
-DIMENSION UNIT = Millimeter (mm).

07/07/20 O. SITTICHAJ / Ch. Chantakorn / M. Somkiat / S. Sugai

DWN.	S. CHAIAMPOL	03/03/17	PROJECTION	TITLE
CHKD.	J. Jiradee		SCALE	DIMENSION OF SX800, FX800
	C. Krathisak		NTS.	
APPD.	Z. Sokiguch			HITT WORKS DWG. No.
HITACHI Hitachi Industrial Technology (Thailand), Ltd.				4HTN000987

REV.	01
SH.	01
	01