


# HITACHI MOLDED CASE CIRCUIT BREAKER

Type	Poles	Rated Insulation Voltage (Ui)	IEC 60947-2 Icu/Ics [kA]		Rated Current	Base Ambient Temperature	Weight	
			230V	400V				
S-30S	2	500	2.5/1.3	1.5/1	3 5 10	40	0.32 kg	
	3				15 20 30 A		0.47 kg	
S-50E	2		30 40 50 A	2.5/1.3	1.5/1		5 10 15 20	0.32 kg
	3						30 40 50 A	0.47 kg

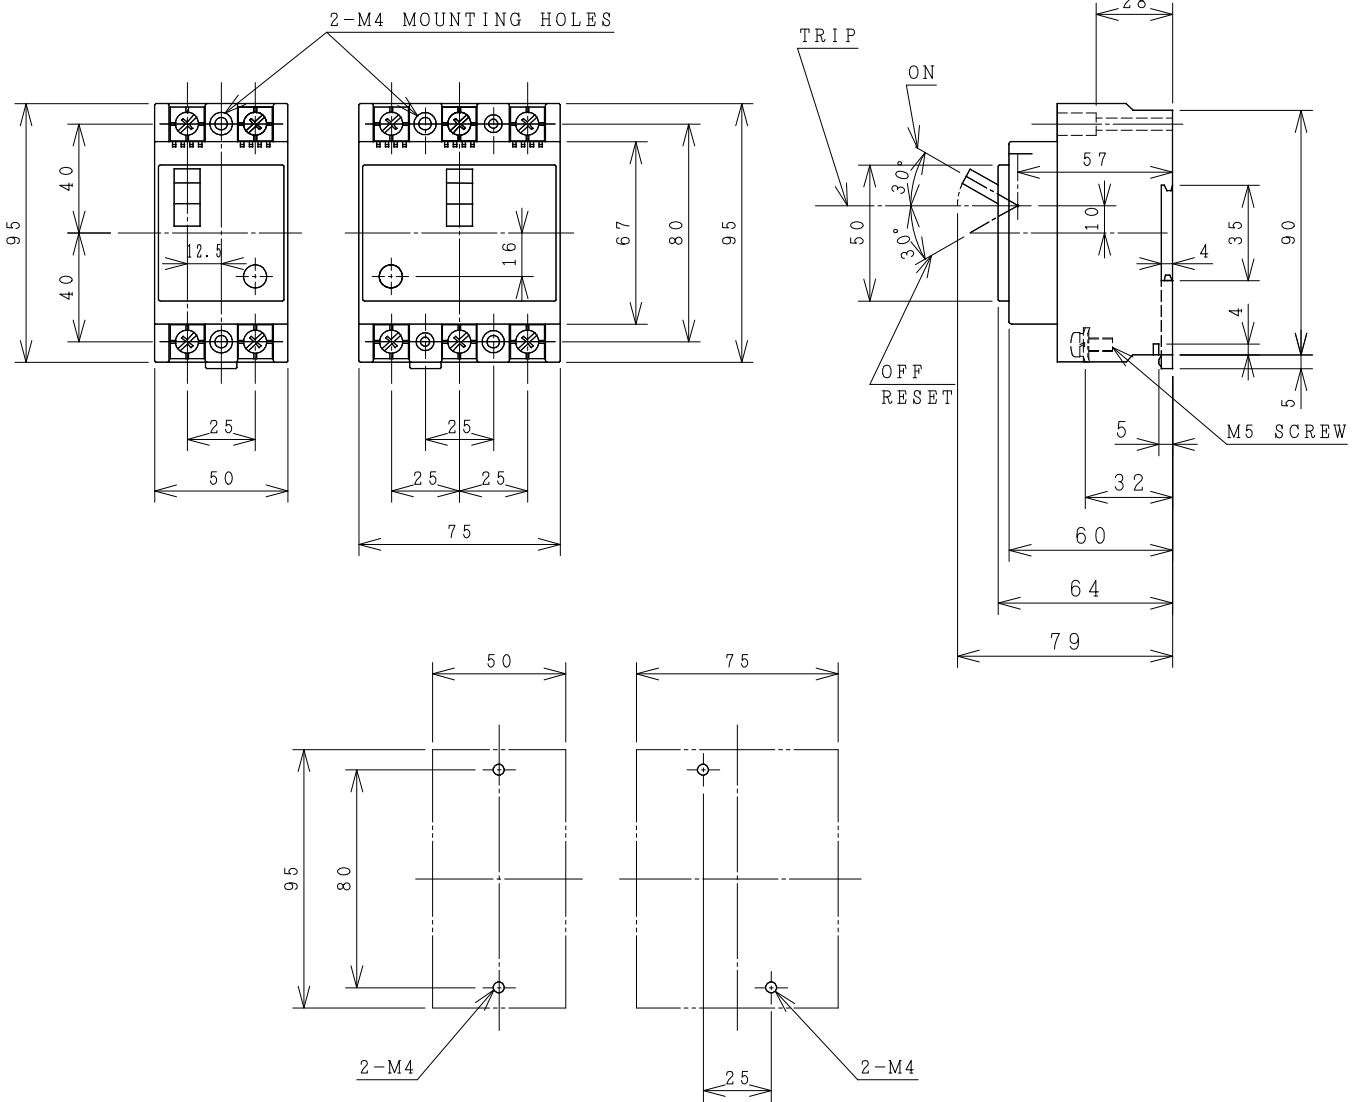

DRILLING PLAN.

ACCESSORIES			
Part	Size	Qty	
		2P	3P
Phase separator	-	-	-
Terminal screw/bolt	M5	4	6
Mounting screw	-	-	-
Assistant handle	-	-	-
Interior accessories	-	-	-

FRONT PLATE CUTOUT.

- THESE DIMENSIONS THE HEIGHT OF FRONT PLATE FROM BASE OF CASE TO COVER IS 60mm.
- CLEARANCE 1mm ON EACH SIDE OF HANDLE.

Δ<sup>x1</sup> 24/06/20 O. SITTICHAJ / Ch. Chantidom / M. Somkiet / S. Sugai

DWN. S. CHAIAMPOL	07/11/17	PROJECTION	TITLE
CHKD. J. Jambae			DIMENSION OF S-30S/S-50E
APPD. C. Krathisak		SCALE NTS.	
HITT WORKS DWG. No.			REV.
4HTN001158			01
			SH.
			01
			01

REMARK

- DIMENSION UNIT = Millimeter (mm).
- Reference DWG NO. 43051748.

**HITACHI**  
Hitachi Industrial Technology (Thailand), Ltd.