


HITACHI MOLDED CASE CIRCUIT BREAKER

Type	Poles	Rated Insulation Voltage (Ui)	IEC 60947-2 Icu/Ics [kA]		Rated Current	Base Ambient Temperature	Weight
			230V	400V			
F-630F	4	690	100/100	50/50	500 600 630	40	13
F-630GB			100/100	75/75			

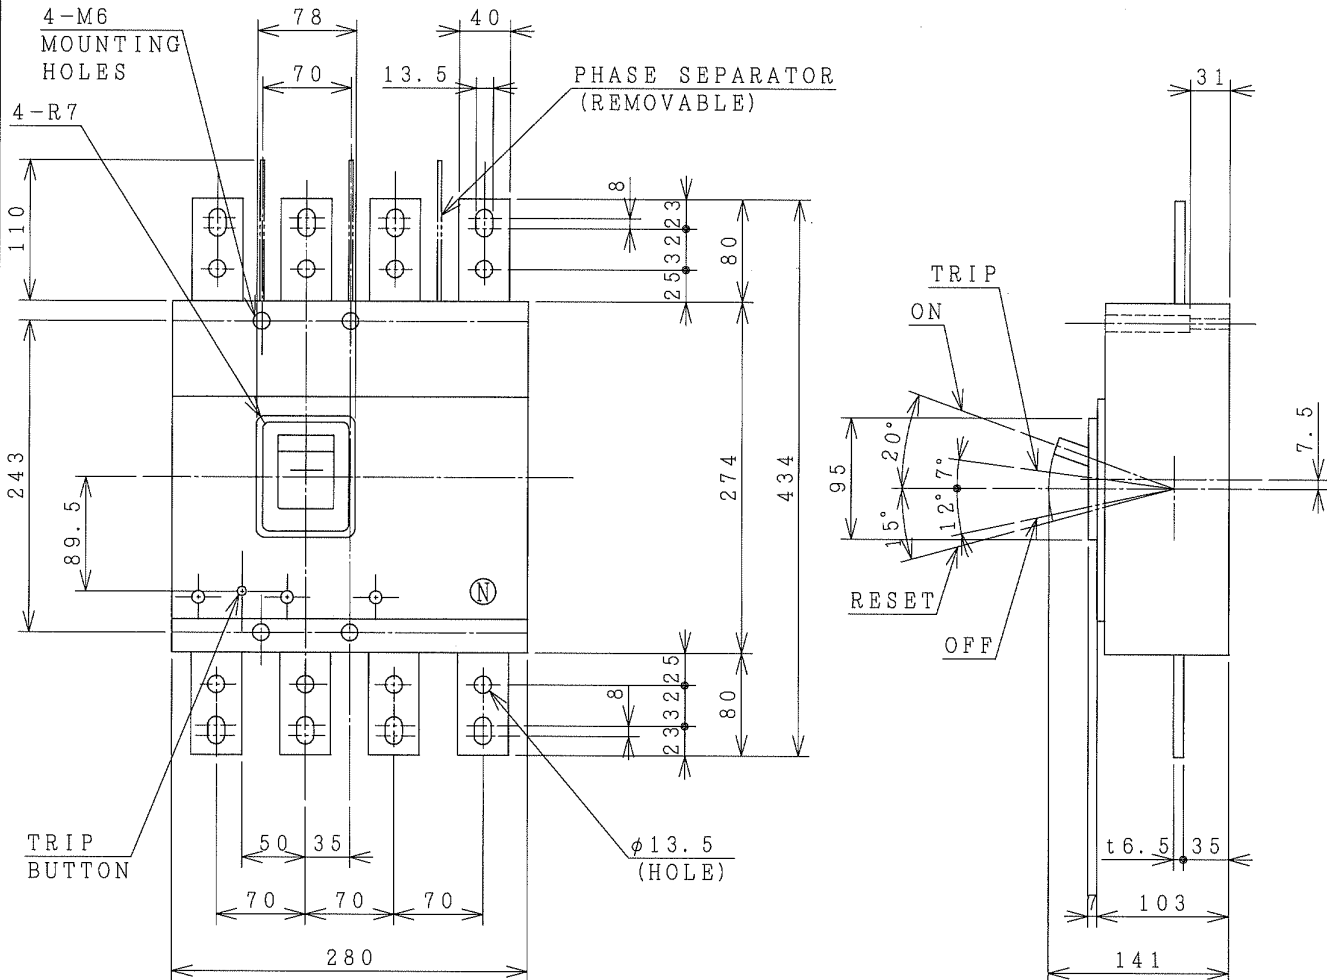

TRIP BUTTON

PHASE SEPARATOR (REMOVABLE)

TRIP

ON

RESET


OFF

φ13.5 (HOLE)

ACCESSORIES

Part	Size	Q'ty
Phase separator	-	6
Terminal screw/bolt	M12x40	18
Mounting screw	M6x45	4
Assistant handle	-	1

Interior accessories AL, AUX, SHT, UVT

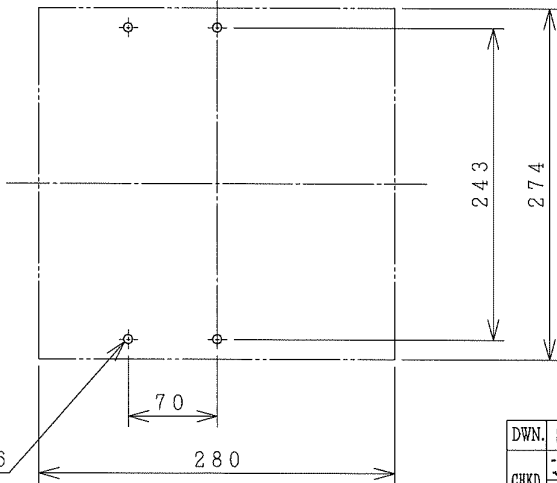

DRILLING PLAN.

DWN. S. CHAIAMPOL	20/02/18	PROJECTION	TITLE
CHKD. J. Jomda	SCALE	NTS.	DIMENSION OF F-630F, F-630GB
APPD. T. bekjaha			
 HITACHI Hitachi Industrial Technology (Thailand), Ltd.			HITT WORKS DWG. No. 4HTN001169
(Reference 43040842R02). *REMARK -DIMENSION UNIT = Millimeter (mm).			REV. 00 SH. 01 01