
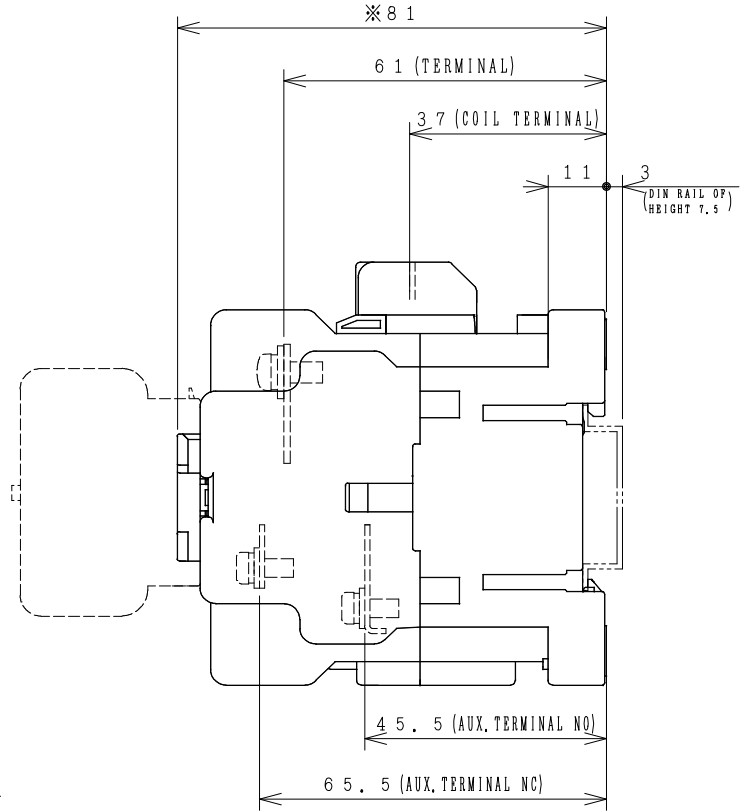


HITACHI ELECTROMAGNETIC CONTACTOR


Type	Rated insulation voltage (Ui)	Max. rated capacity of motor			Rated thermal current (AC1 = Ith)	Applicable standard	Aux. Contact	Weight
		240V	5.5kW	22A				
HS20	AC 690 V	440V	11kW	22A	32 A	IEC 60947-4-1	1a1b or 2a2b	0.41 kg
		240V	5.5kW	22A				

※WITH AUX. CONTACT SIDE ON UNIT = 88mm.


※WITH AUX. CONTACT HAED ON UNIT = 112mm.

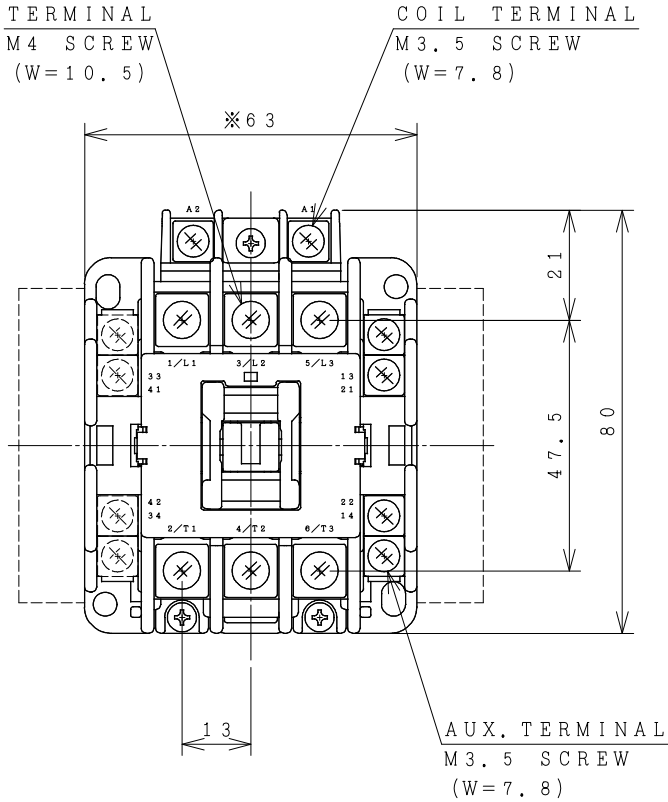

OUTLINE DIMENSIONS.

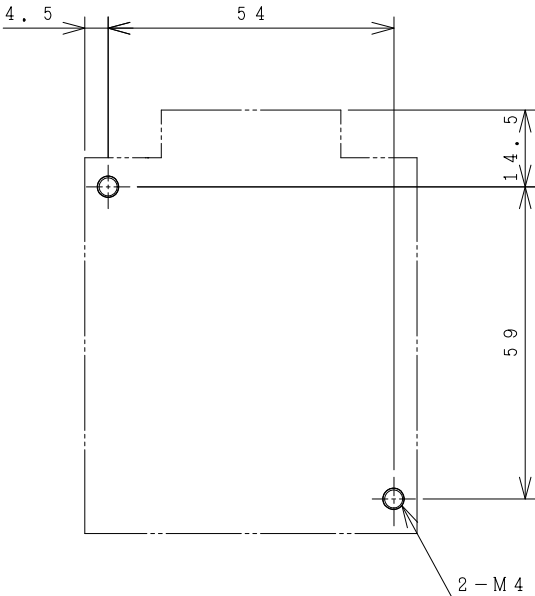

MOUNTING HOLES.

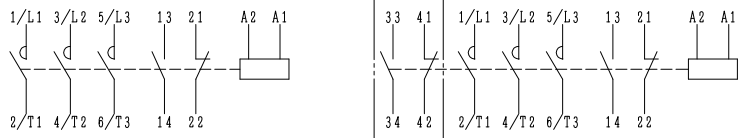

AUX. CONTACTS. : 1a1b

2a2b

CONTACTS ARRANGEMENT.

(Reference 43067190R04).

※REMARK

- DIMENSION UNIT = Millimeter (mm).
- (a) = AUX. CONTACT NORMALLY OPENED.
- (b) = AUX. CONTACT NORMALLY CLOSED.

DWN. O. SITTICHAJ 07/06/16	PROJECTION	TITLE
CHKD. <i>C. Kiatissak</i>	SCALE	DIMENSION OF HS20
APPD. <i>T. Kiatissak</i>	NTS.	
HITACHI Hitachi Industrial Technology (Thailand), Ltd.		HITT WORKS DWG. No. 4HTN000796
		REV.
		00
		SH.
		01
		01

54 x 56

54 x 60

ALSO POSSIBLE.

(W=) : WIDTH OF TERMINAL.