


# HITACHI ELECTROMAGNETIC SWITCH


Type	Rated insulation voltage (Ui)	Max. rated capacity of motor			Rated thermal current (AC1 = Ith)	Applicable standard	Aux. Contact	Weight
		240V	7.5kW	27A				
HS25-RT	AC 690 V	240V	7.5kW	27A	35 A	IEC 60947-4-1	1a1b x2 or 2a2b x2	1.13 kg
HS25-RTK		440V	11kW	26A				

※WITH AUX. CONTACT SIDE ON UNIT = 161mm.

※WITH AUX. CONTACT HEAD ON UNIT = 112.5mm.

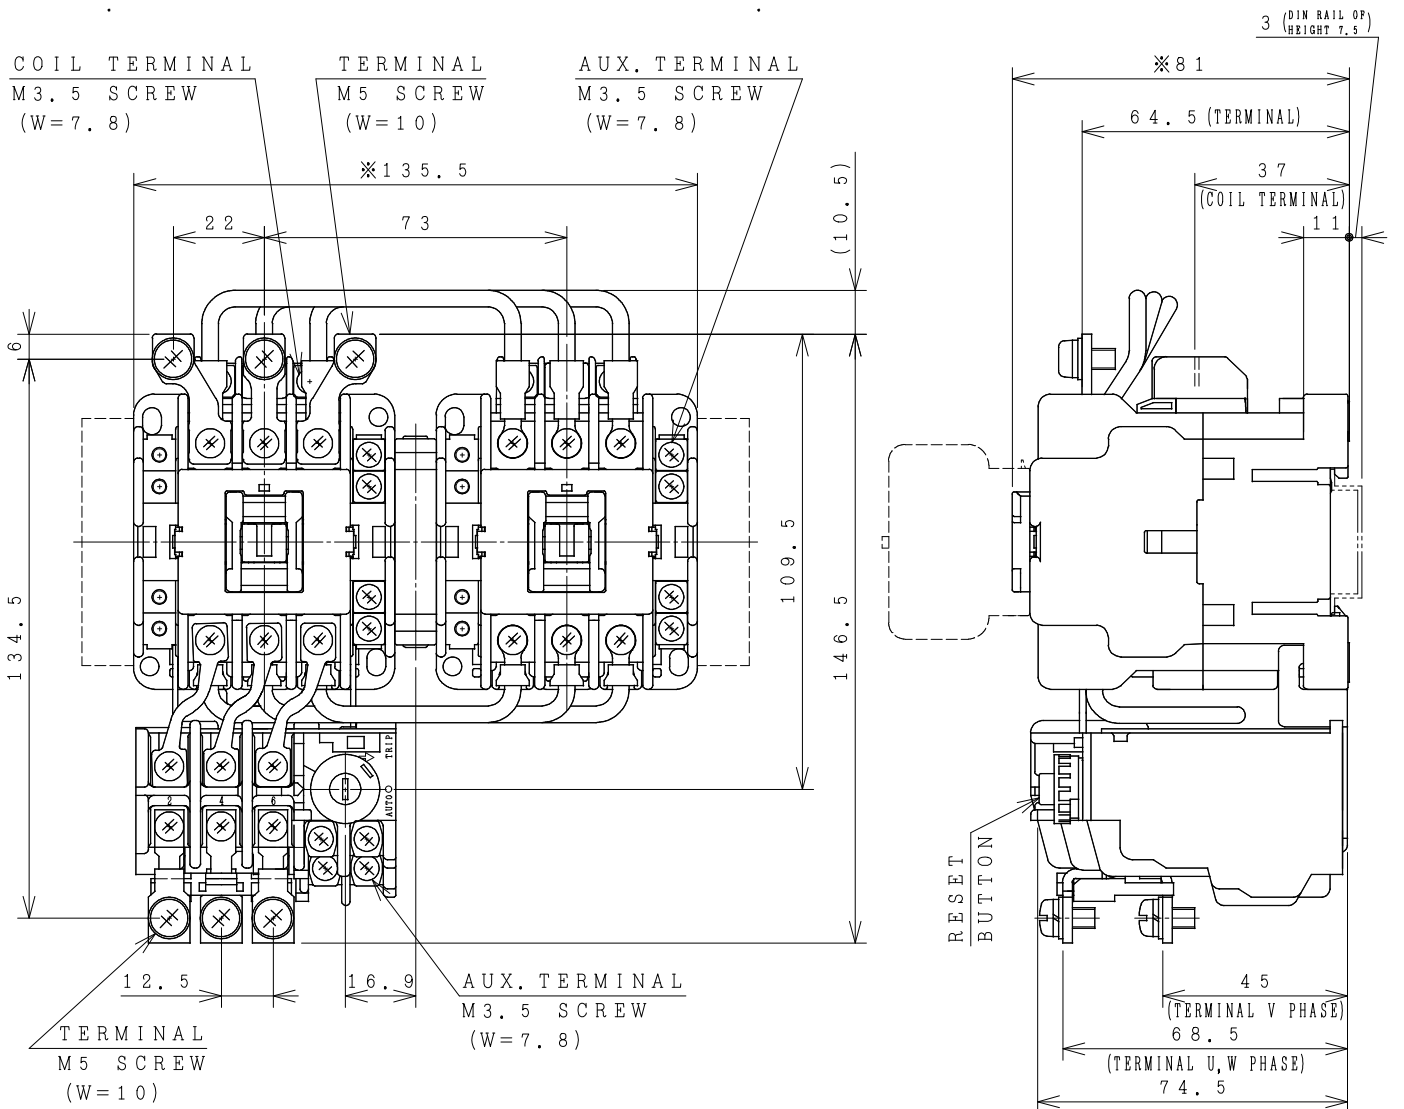

OUTLINE DIMENSIONS.

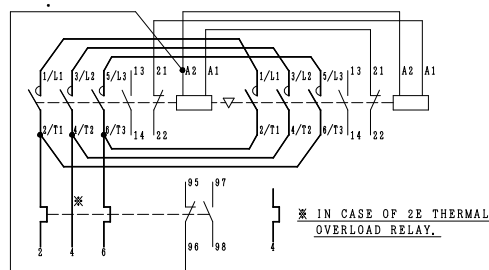

CONTACTS ARRANGEMENT.

**MOUNTING HOLES.**  
(W=) : WIDTH OF TERMINAL.

※REMARK  
- DIMENSION UNIT = Millimeter (mm).  
- (a) = AUX. CONTACT NORMALLY OPENED.  
- (b) = AUX. CONTACT NORMALLY CLOSED.

(Reference 43067258R05).

DWN. O. SITTICHAJ 01/08/16	PROJECTION	TITLE
CHKD. <i>C. Kiatissak</i>	SCALE	DIMENSION OF HS25-RT, RTK
APPD. <i>T. Kiatissak</i>	NTS.	
HITACHI Hitachi Industrial Technology (Thailand), Ltd.		HITT WORKS DWG. No. 4HTN000811
		REV. 00 SH. 01 01