


HITACHI ELECTROMAGNETIC CONTACTOR


Type	Rated insulation voltage (Ui)	Max. rated capacity of motor			Rated thermal current (AC1 = Ith)	Applicable standard	Aux. Contact	Weight
		240V	15kW	50A				
HS50-RG	AC 690 V	240V	15kW	50A	70 A	IEC 60947-4-1	2a2b x2	2.1 kg
		440V	22kW	50A				

※WITH AUX. CONTACT SIDE ON UNIT = 189mm.


※WITH AUX. CONTACT HEAD ON UNIT = 152mm.

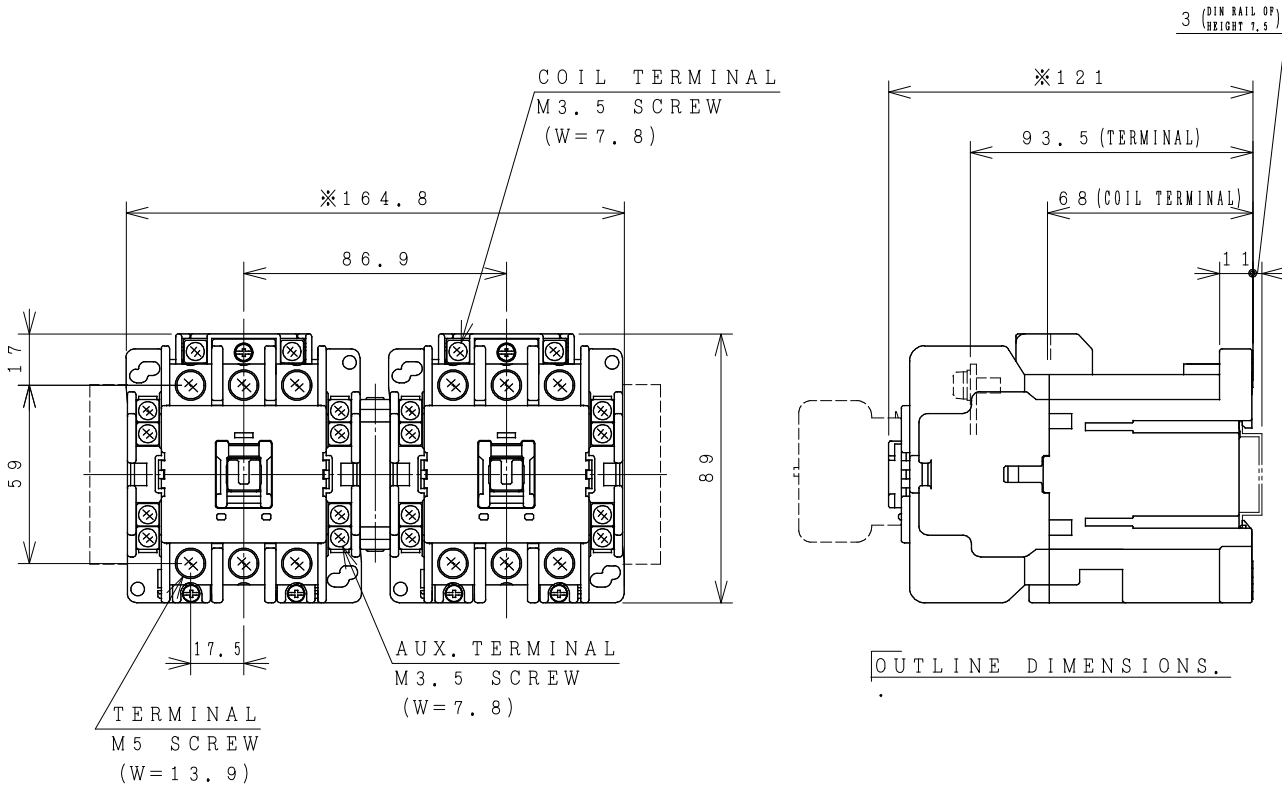

OUTLINE DIMENSIONS.

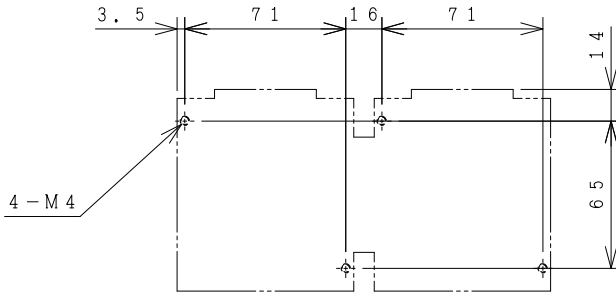

MOUNTING HOLES.

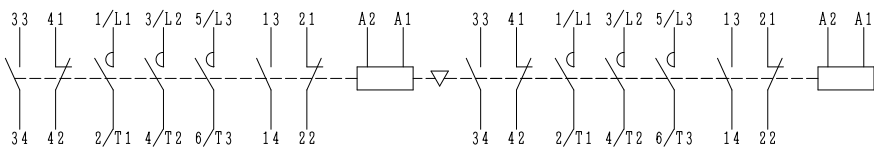

AUX. CONTACTS : 2a2b x 2
CONTACTS ARRANGEMENT.

(W=) : WIDTH OF TERMINAL.
 ※REMARK
 - DIMENSION UNIT = Millimeter (mm).
 - (a) = AUX. CONTACT NORMALLY OPENED.
 - (b) = AUX. CONTACT NORMALLY CLOSED.

(Reference 43068968R00).

OWN. O. SITTICHAJ	20/08/16	PROJECTION	TITLE
CHKD. <i>C. Kiatissak</i>		SCALE	DIMENSION OF HS50-RG
APPD. <i>T. Kiatissak</i>		NTS.	
HITACHI Hitachi Industrial Technology (Thailand), Ltd.			HITT WORKS DWG. No. 4HTN000838
			REV. 00 SH. 01 01