


HITACHI ELECTROMAGNETIC CONTACTOR


Type	Rated insulation voltage (Ui)	Max. rated capacity of motor			Rated thermal current (AC1 = Ith)	Applicable standard	Aux. Contact	Weight
		240V	3kW	12A				
H11	660 V	440V	4kW	9A	20 A	IEC 60947-4-1	1a1b or 2a, 2b	0.29 kg

AUX. TERMINAL
M3.5 SCREW
(W=7.8)

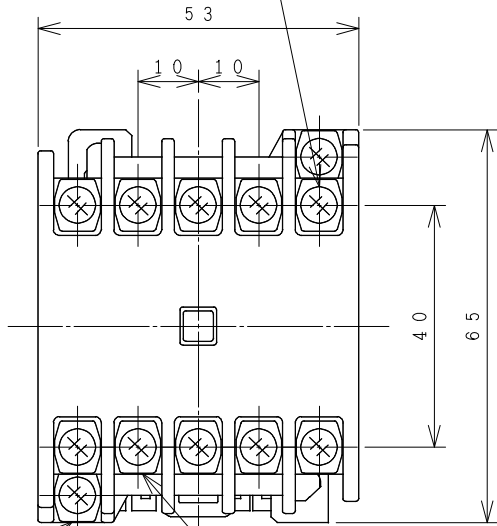


COIL TERMINAL
M3.5 SCREW
(W=7.8)


TERMINAL
M3.5 SCREW
(W=7.8)

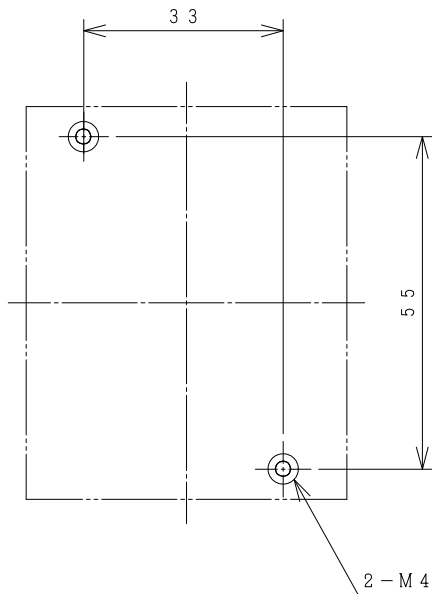


MOUNTING HOLES.

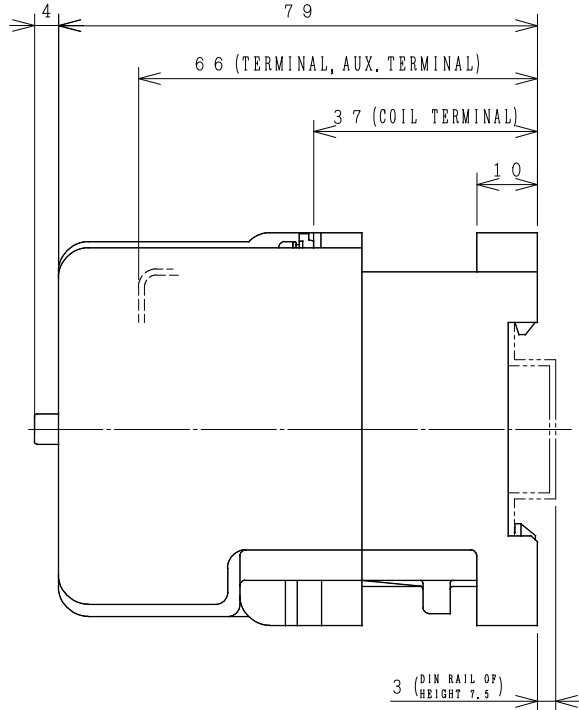

OUTLINE DIMENSIONS.



1 a 1 b

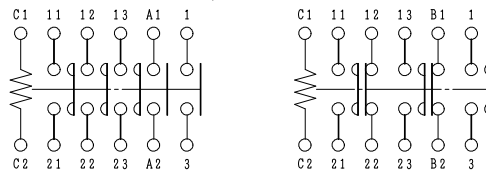

2 a

2 b

CONTACTS ARRANGEMENT.

(Reference 43040334R03).

※REMARK

- DIMENSION UNIT = Millimeter (mm).

- (a) = AUX. CONTACT NORMALLY OPENED.

- (b) = AUX. CONTACT NORMALLY CLOSED.

30 x 48

34 x 48

34 x 52

35 x 50

ALSO POSSIBLE.

(W=) : WIDTH OF TERMINAL.

DWN. C. JEBRANAN	19/09/16	PROJECTION	TITLE
CHKD. <i>Jan-a</i>	S	SCALE NTS.	DIMENSION OF H11
APPD. <i>C. Kiattisak</i>			
 Hitachi Industrial Technology (Thailand), Ltd.			REV. 00 SH. 01 01

4HTN000844