



# HITACHI ELECTROMAGNETIC CONTACTOR

Type	Rated insulation voltage (Ui)	Max. rated capacity of motor			Rated thermal current (AC1 = Ith)	Applicable standard	Aux. Contact	Weight
		240V	37kW	126A				
H125C-G	AC 660	440V	60kW	125A	150 A	IEC 60947-4-1	2a1b	2.2 kg
	V							


\*WITH AUX. CONTACT 4 a 3 b = 124 mm.

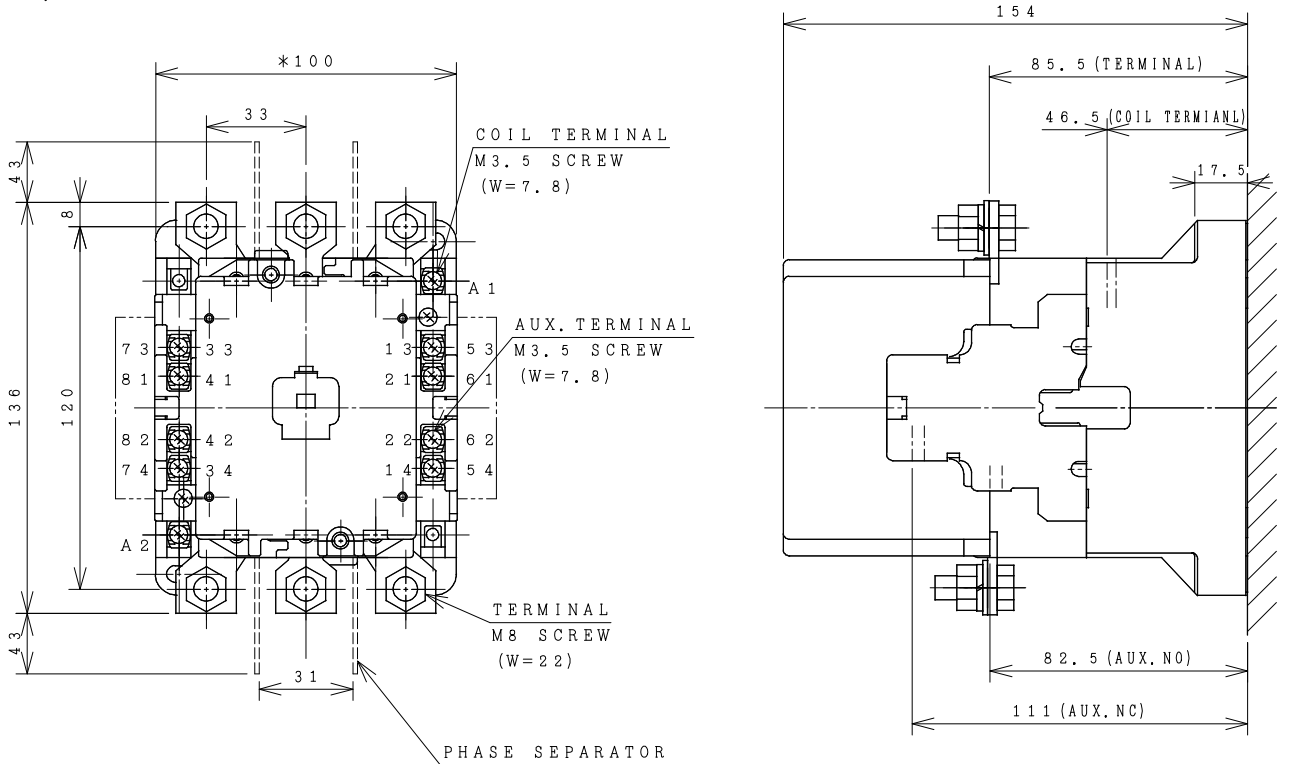

OUTLINE DIMENSIONS.

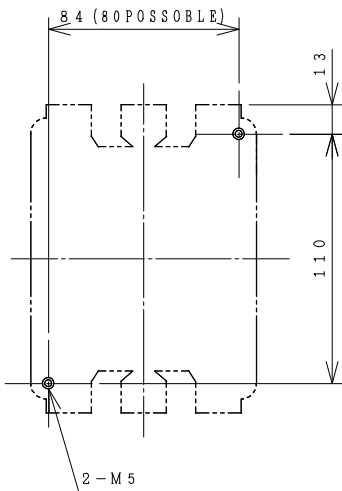

MOUNTING HOLES.

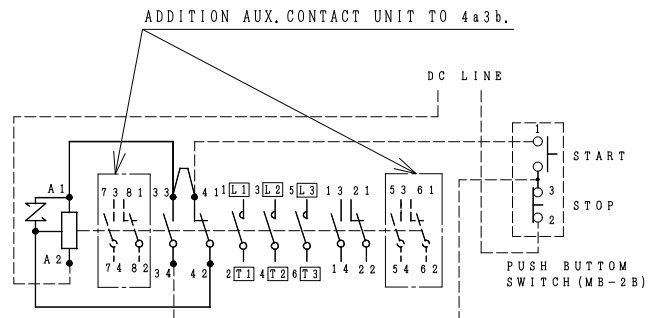

CONTACTS ARRANGEMENT.

(Reference 43057056R01).

**\*REMARK**

- DIMENSION UNIT = Millimeter (mm.).
- (a) = AUX. CONTACT NORMALLY OPENED.
- (b) = AUX. CONTACT NORMALLY CLOSED.

DWN. S. CHAIAMPOL	23/08/16	PROJECTION	TITLE
CHKD. <i>Jan-a</i>		SCALE	DIMENSION OF H125C-G
APPD. <i>C.Kiattisak</i>		NTS.	
HITACHI Hitachi Industrial Technology (Thailand), Ltd.			HITT WORKS DWG. No. 4HTN000886
			REV. 00 SH. 01 01

(W=) : WIDTH OF TERMINAL.