
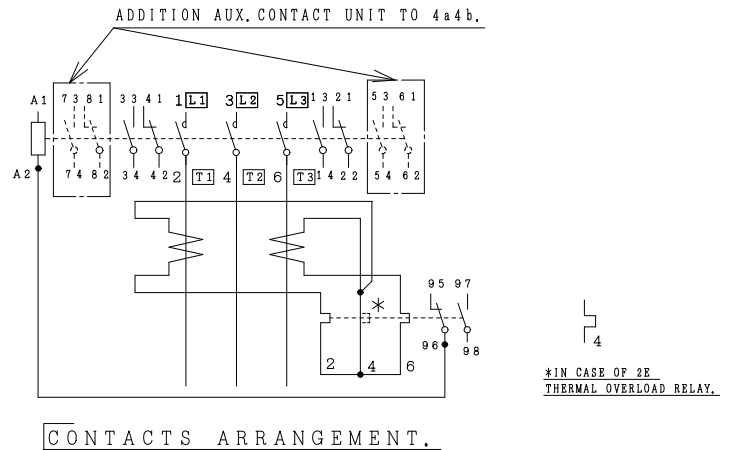
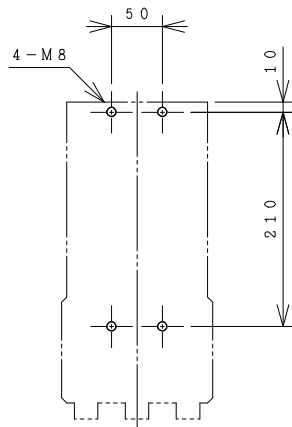
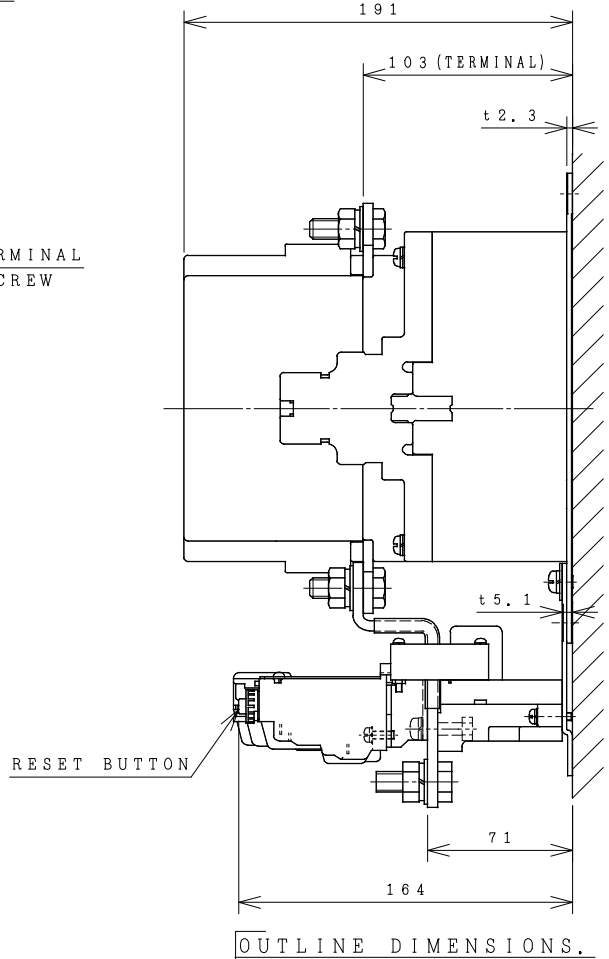


HITACHI ELECTROMAGNETIC SWITCH

Type	Rated insulation voltage (Ui)	Max. rated capacity of motor			Rated thermal current (AC1 = Ith)	Applicable standard	Aux. Contact	Weight
H200C-T	AC 660 V	240V	55kW	182A	260 A	IEC 60947-4-1	2a2b	7.2 kg
H200C-TK		440V	90kW	180A				

*WITH AUX. CONTACT 4 a 4 b = 162 mm.

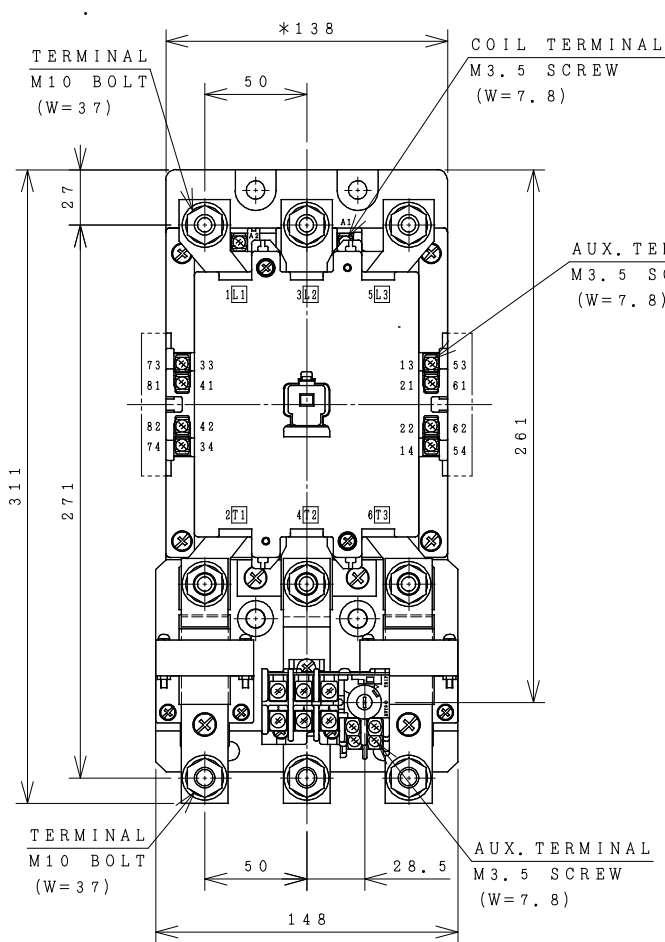

(Reference 43055992R04).

DWN. S. CHAIAMPOL CHKD. <i>[Signature]</i> APPD. <i>[Signature]</i>	26/08/16 PROJECTION SCALE NTS.	TITLE DIMENSION OF H200C-T, TK HITT WORKS DWG. No. 4HTN000902	REV. 00 SH. 01 01
---	---	---	-------------------------------

(W=) : WIDTH OF TERMINAL.
 *REMARK
 - DIMENSION UNIT = Millimeter (mm.).
 - (a) = AUX. CONTACT NORMALLY OPENED.
 - (b) = AUX. CONTACT NORMALLY CLOSED.

HITACHI
 Hitachi Industrial Technology (Thailand), Ltd.