
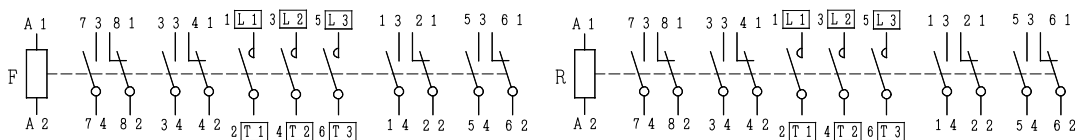
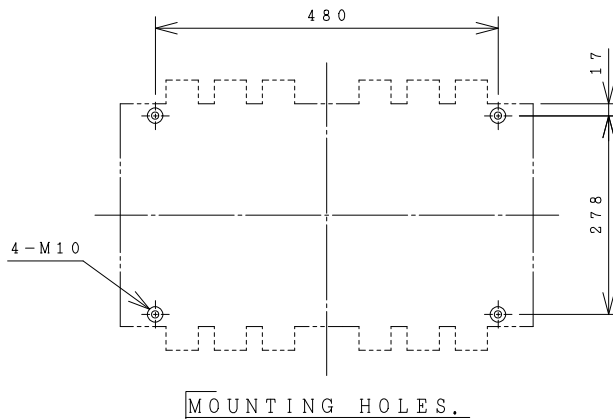


HITACHI ELECTROMAGNETIC CONTACTOR

Type	Rated insulation voltage (Ui)	Max. rated capacity of motor			Rated thermal current (AC1 = Ith)	Applicable standard	Aux. Contact	Weight
		240V	200kW (AC2)	800A (AC2)				
H800C-R	660 V	440V	400kW (AC2)	800A (AC2)	800 A	IEC 60947-4-1	(4a4b) x2	57 kg

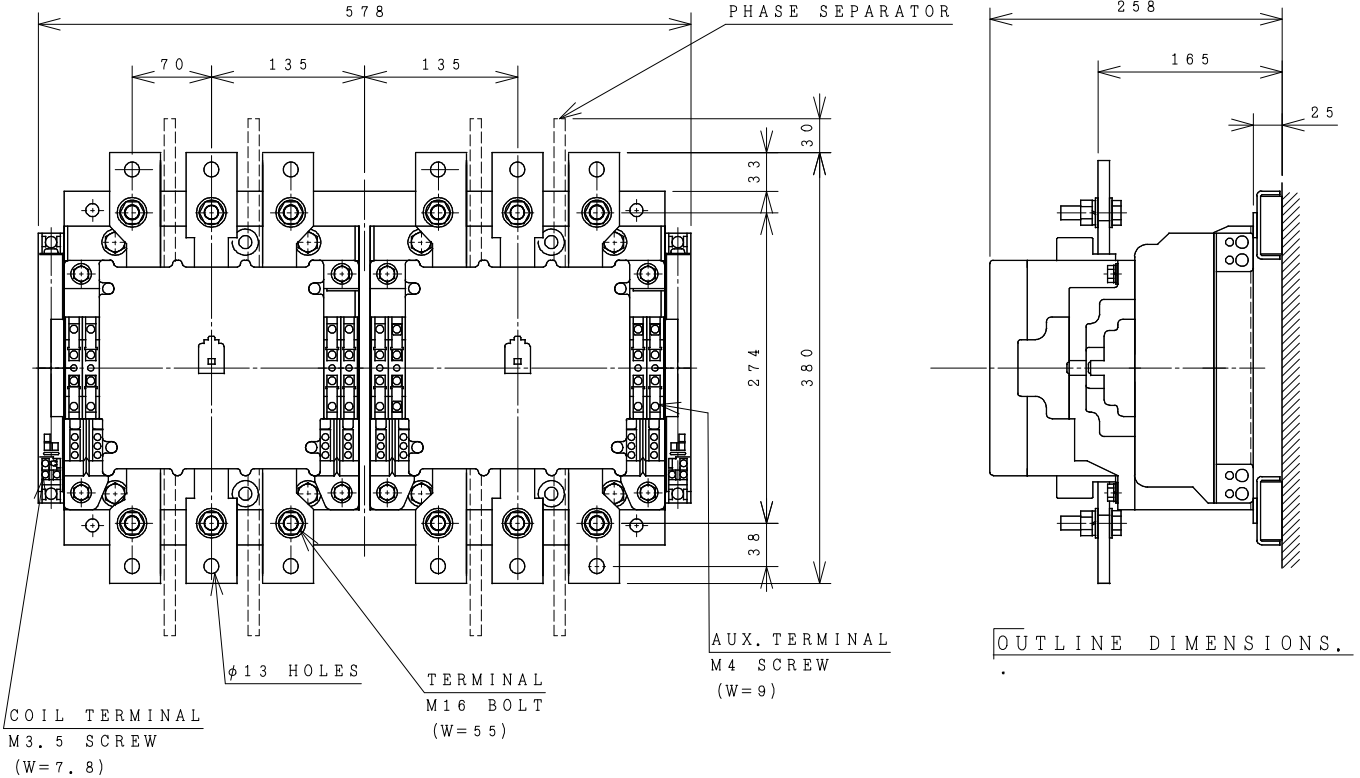

CONTACTS ARRANGEMENT.

(Reference 43056009R01).

DWN. S. CHAIAMPOL 09/09/16 CHKD. <i>[Signature]</i> APPD. <i>[Signature]</i>	PROJECTION SCALE NTS.	TITLE DIMENSION OF H800C-R	HITT WORKS DWG. No. 4HTN000948	REV. 00 SH. 01 01
--	---------------------------------	----------------------------------	-----------------------------------	-------------------------------

(W=) : WIDTH OF TERMINAL.

※REMARK

- DIMENSION UNIT = Millimeter (mm.).
- (a) = AUX. CONTACT NORMALLY OPENED.
- (b) = AUX. CONTACT NORMALLY CLOSED.

HITACHI
Hitachi Industrial Technology (Thailand), Ltd.