


# HITACHI CONTACTOR RELAYS

Type	Rated insulation voltage (Ui)	Rate Current (AC15)		Rated thermal current (Ith)	Applicable standard	Aux. Contact	Weight
		240V	3 (2) A				
X5 (X5-W)	AC 660 V	440V	3 (1) A	15 (10) A	IEC 60947-5-1	5a, 4a1b 3a2b, 2a3b	0.29 kg

(X5-W) IN THE CASE OF TWIN CONTACTS TYPE.

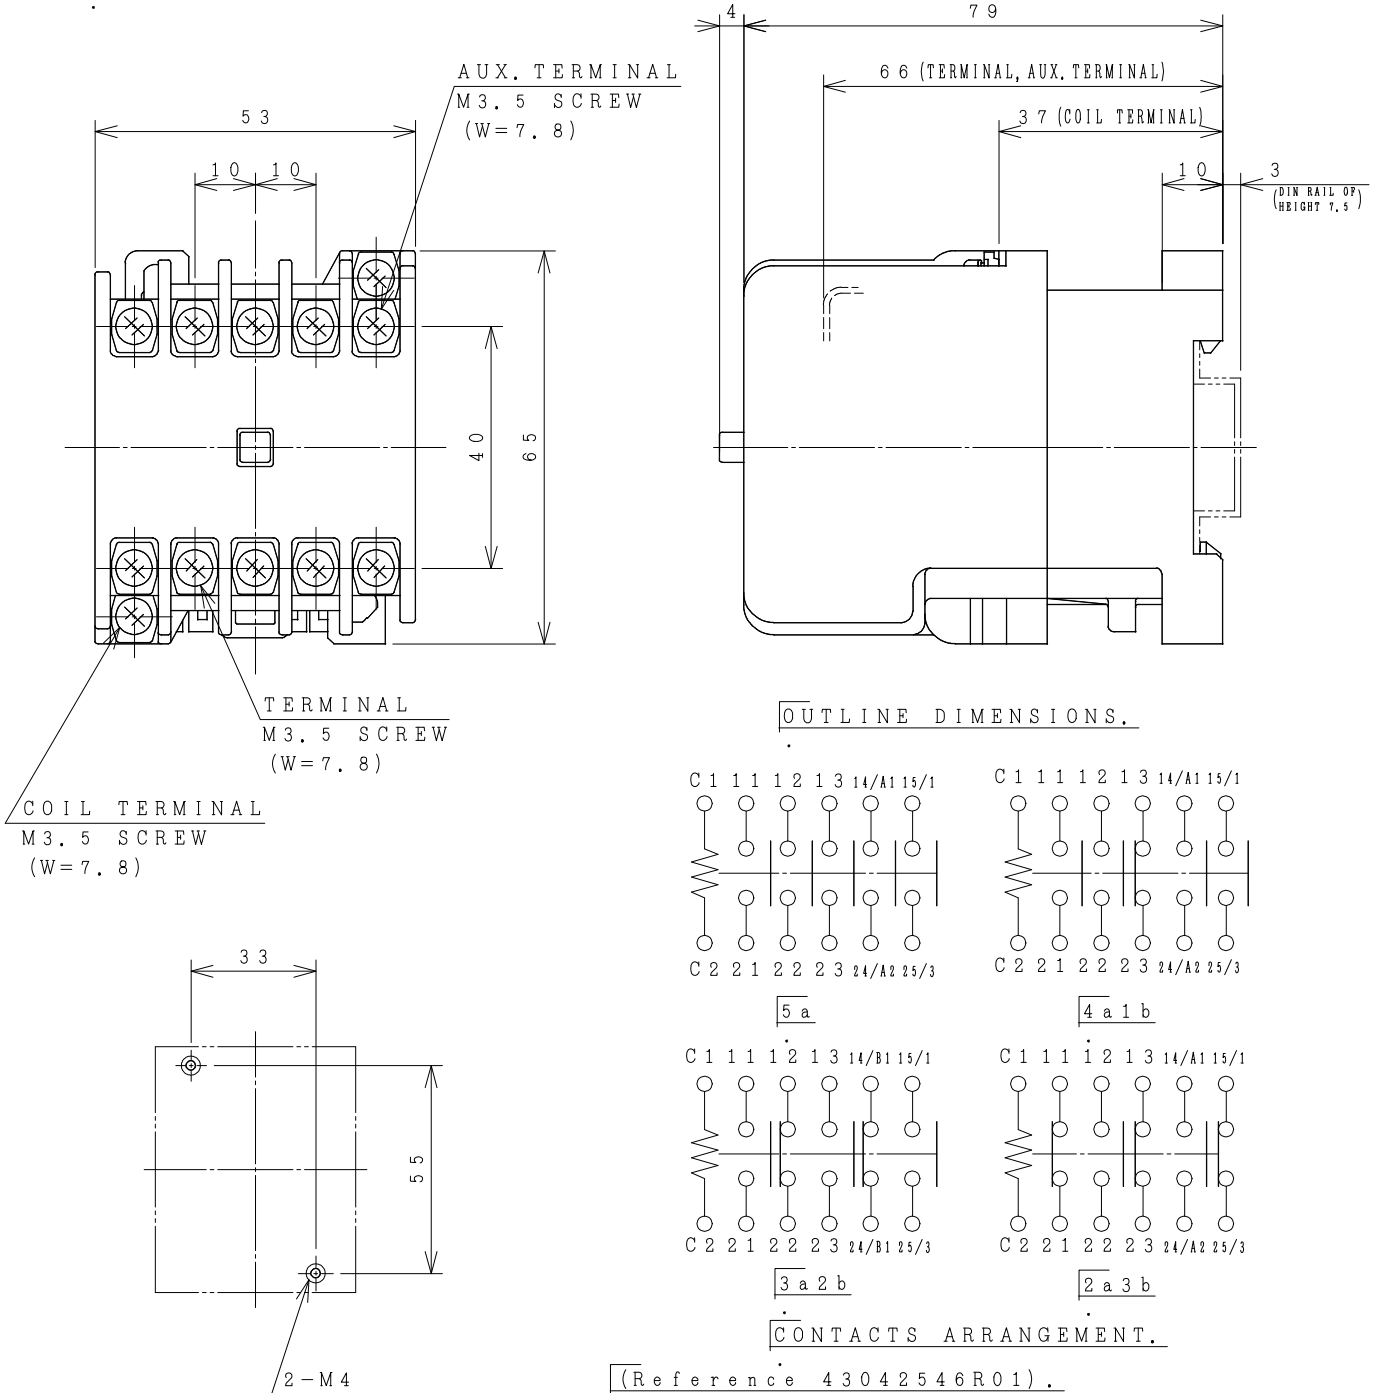

(Reference 43042546R01).

※REMARK

- DIMENSION UNIT = Millimeter (mm).

- (a) = AUX. CONTACT NORMALLY OPENED.

- (b) = AUX. CONTACT NORMALLY CLOSED.

DWN. C. JERRANAN 12/09/16	PROJECTION	TITLE	DIMENSION OF X5, X5-W
CHKD. <i>C. Kiatissak</i>	SCALE NTS.		
APPD. <i>T. Kiatissak</i>			
HITT WORKS DWG. No.			REV.
<b>HITACHI</b> Hitachi Industrial Technology (Thailand), Ltd.			00
4HTN000952			01
			01

- 34 x 48
- 34 x 52
- 35 x 50

ALSO POSSIBLE.  
(W) : WIDTH OF TERMINAL.