
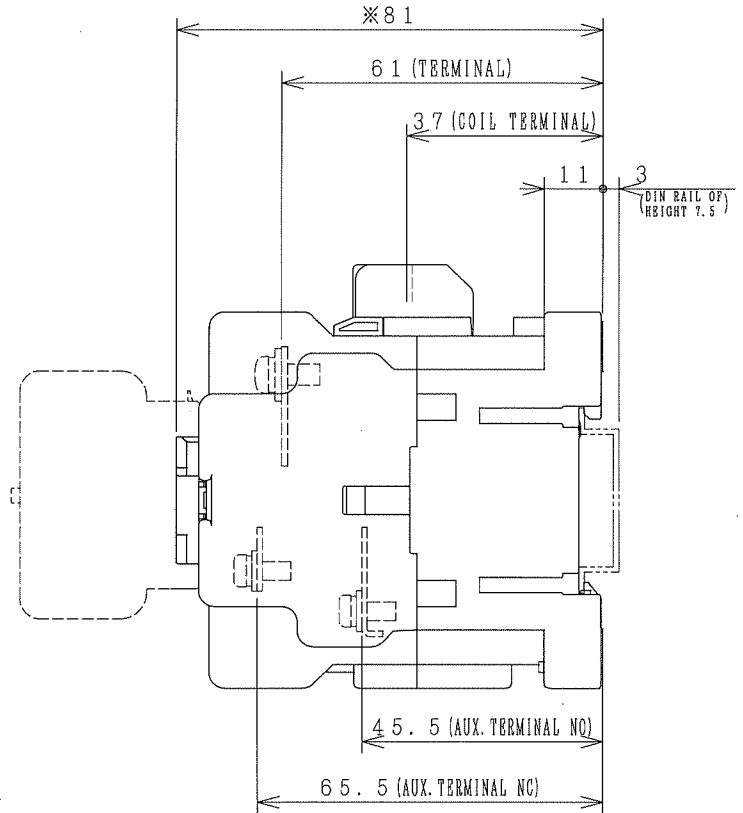


HITACHI ELECTROMAGNETIC CONTACTOR


Type	Rated insulation voltage (Ui)	Max. rated capacity of motor			Rated thermal current (AC1 = Ith)	Applicable standard	Aux. Contact	Weight
HS32	AC 690 V	240V	7.5kW	32A	32 A	IEC 60947-4-1	1a1b	0.42 kg
		440V	15kW	32A			2a2b	

※WITH AUX. CONTACT SIDE ON UNIT = 88mm.


※WITH AUX. CONTACT HAED ON UNIT = 112mm.

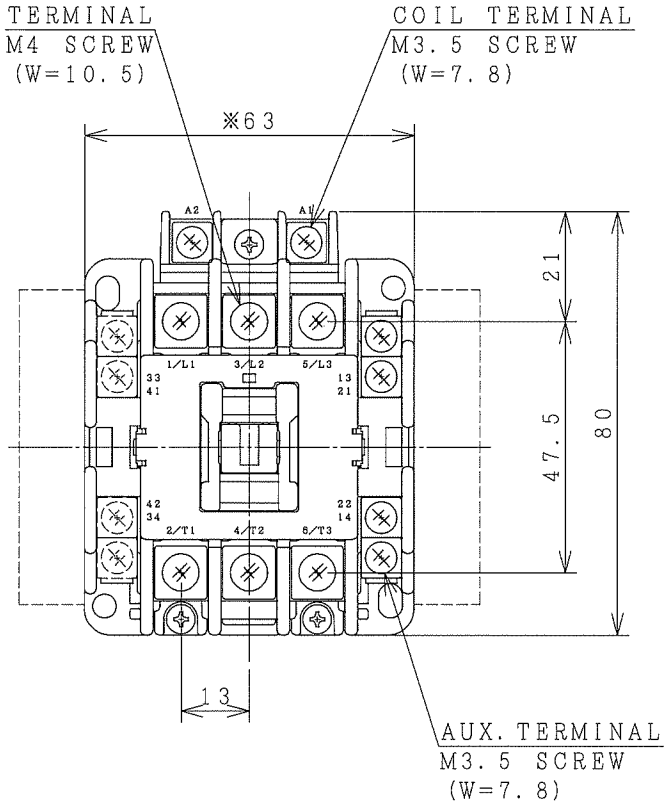

OUTLINE DIMENSIONS.

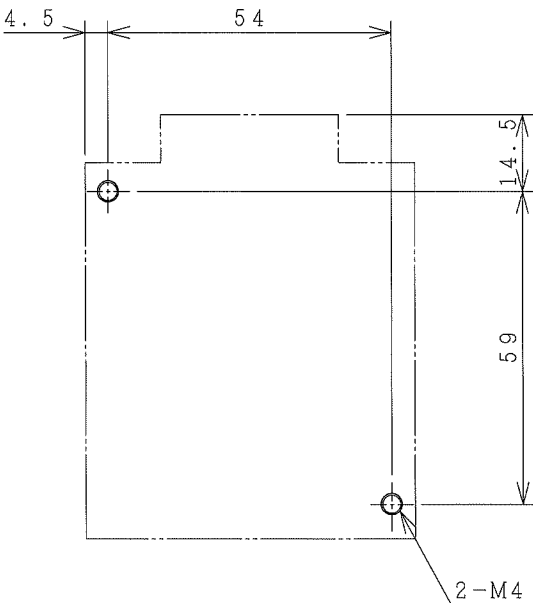

MOUNTING HOLES.

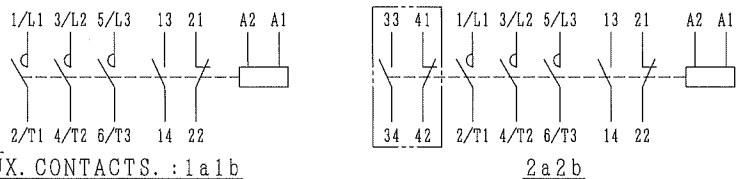

AUX. CONTACTS. : la1b
CONTACTS ARRANGEMENT.

※REMARK

- DIMENSION UNIT = Millimeter (mm).
- (a) = AUX. CONTACT NORMALLY OPENED.
- (b) = AUX. CONTACT NORMALLY CLOSED.

PWN. C. SITTICHAJ	15/05/18	PROJECTION	TITLE
CHKD. <i>C. Krattik</i>	S	SCALE NTS.	DIMENSION OF HS32
APPD. <i>S. Sugar</i>			
HITACHI Hitachi Industrial Technology (Thailand), Ltd.			HITT WORKS DWG. No.
4HTN001154			REV. 00 SH. 01 01

54 x 56
54 x 60

ALSO POSSIBLE.

(W=) : WIDTH OF TERMINAL.